


P3.91 1000*1000 Outdoor Magnesium Alloy Full Color LED Screen

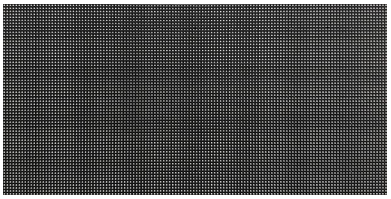

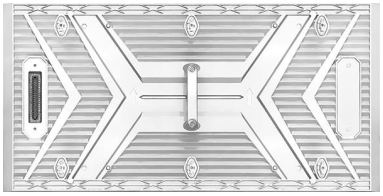

Module

Cabinet

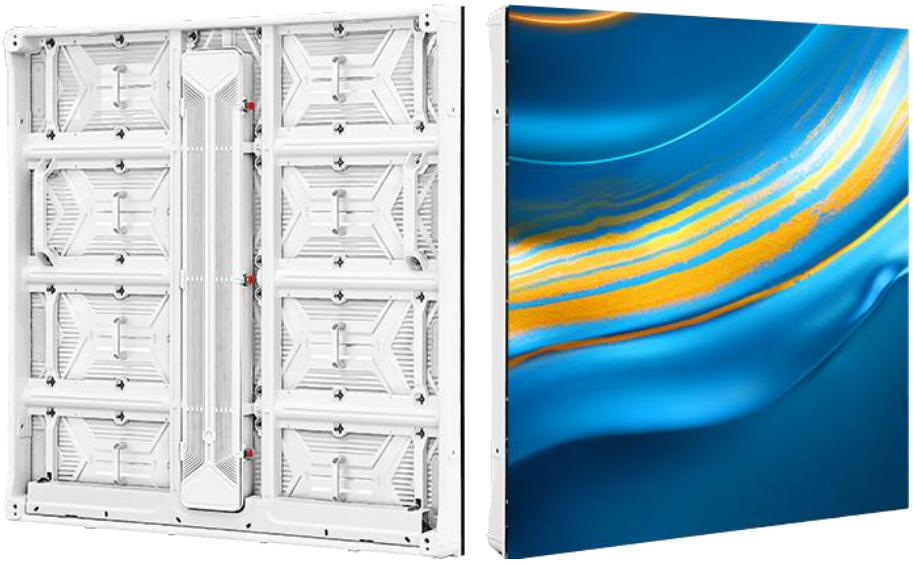

PRODUCT FEATURES

1. Front&Rear Maintenance: All components support complete front maintenance, saving space.
2. Side Waterproofing: ensures excellent protection between modules and cabinets.
3. Fully Magnesium Alloy Cabinet: Ultra-light, ultra-thin, and exceptionally strength.
4. High Reliability: Fully enclosed modules with front and rear IP65 protection; hidden cabling for enhanced safety, aesthetics, and stability.
5. Applications: Ideal for outdoor advertising, government and corporate projects, cultural tourism, sports events, branding campaigns, and commercial real estate, etc.

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	3.91mm、128*64、500mm*250mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、Module Power	DC4.5V、≤82W
	Driving IC、Driving way	ICN2153S、1/8S
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、24kg/Cabinet
	Resolution rate、size、Module quantity	256*256Dots、1000*1000*90mm、2*4
	Density	65410 Dots/㎡
	White balance 、Color temperature	5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤660w/㎡、≤220w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、Front/Back：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	100kg （Estimated data,4pcs /Case）
Outer Package Size	1100*580*1200mm （Estimated data,4pcs /Case）
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

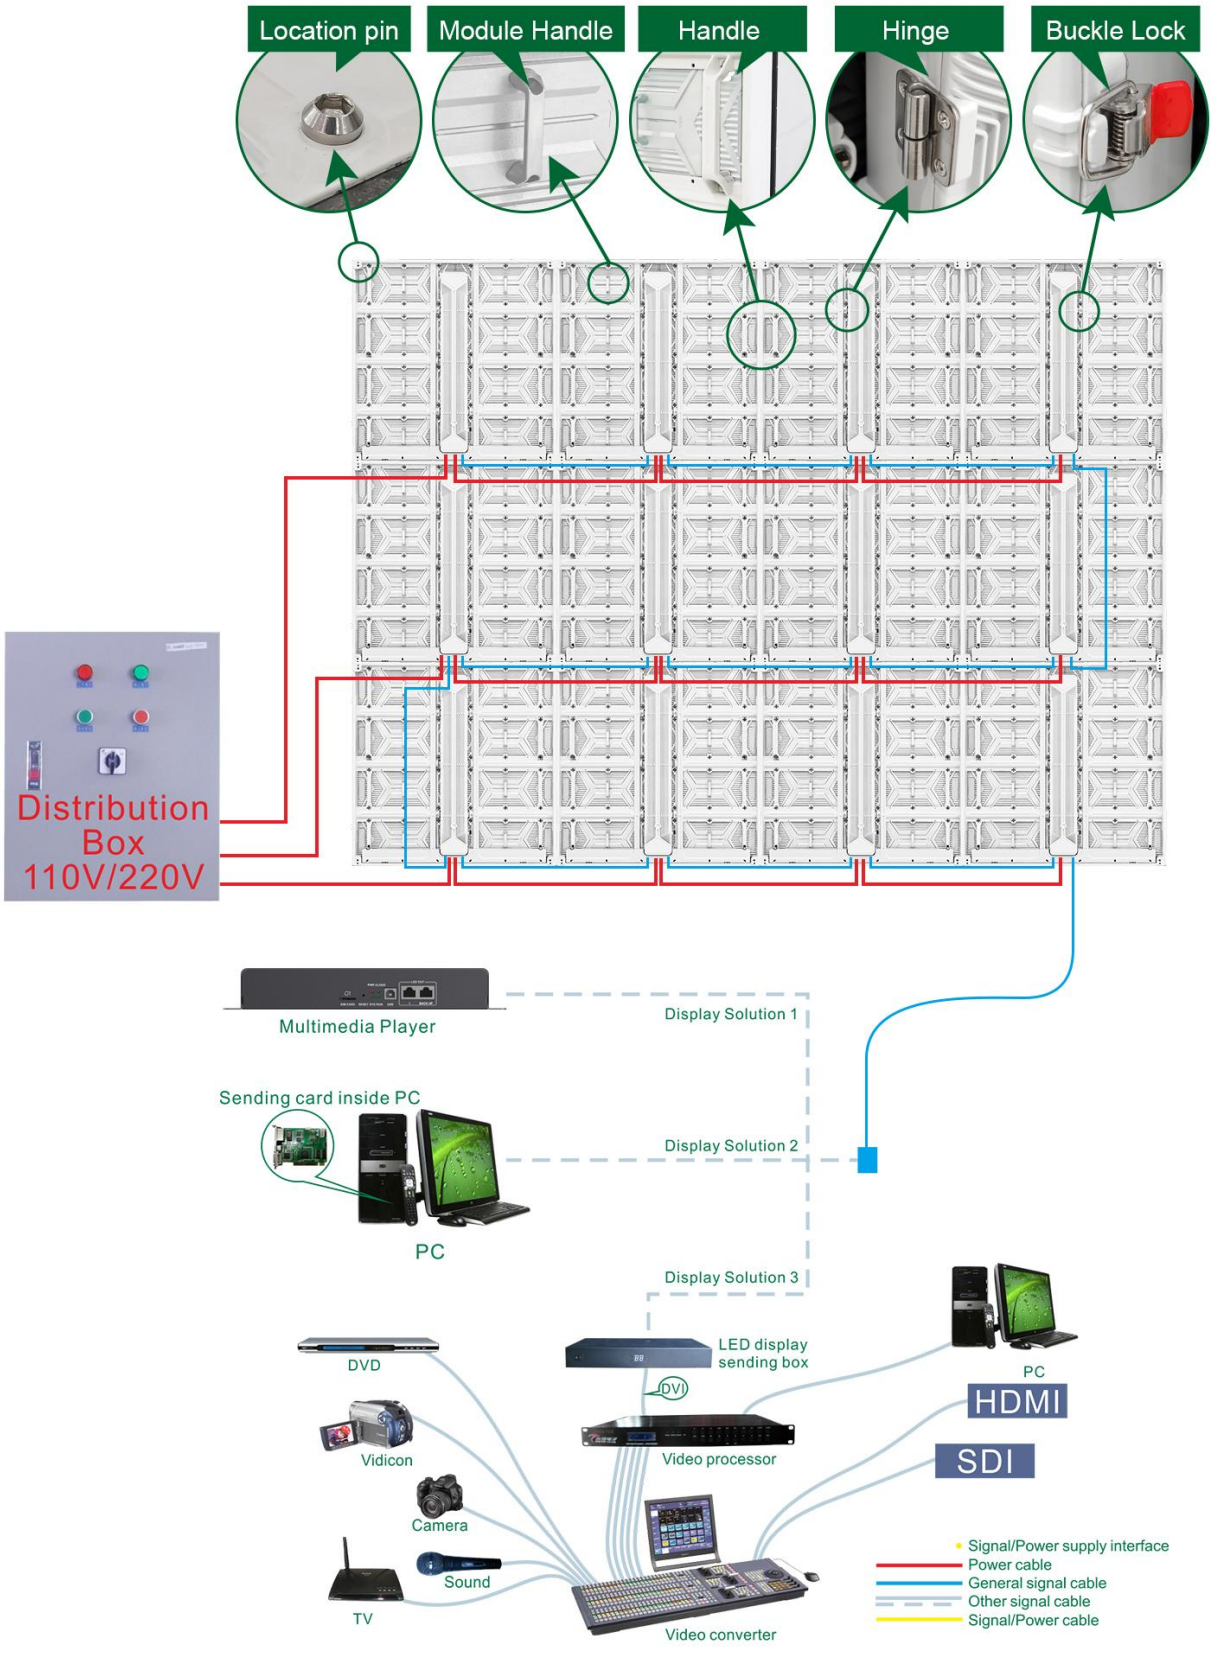

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com


P4.81 1000*1000 Outdoor Magnesium Alloy Full Color LED Screen

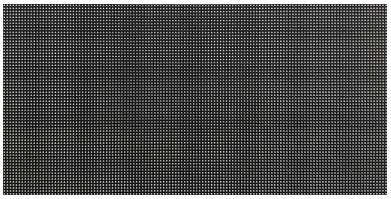

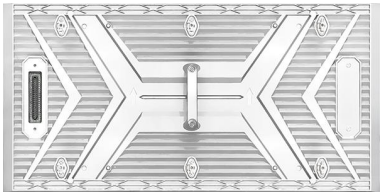

Module

Cabinet

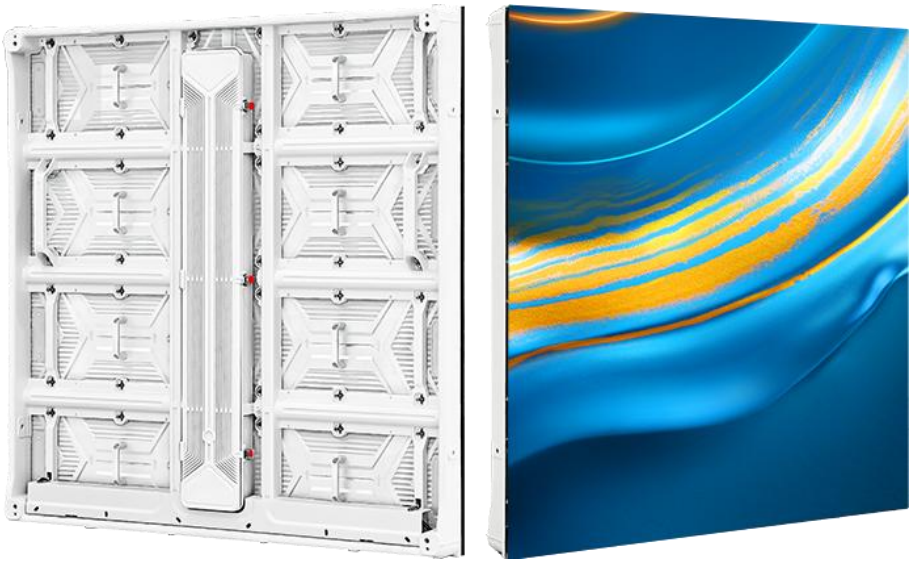

PRODUCT FEATURES

6. Front&Rear Maintenance: All components support complete front maintenance, saving space.
7. Side Waterproofing: ensures excellent protection between modules and cabinets.
8. Fully Magnesium Alloy Cabinet: Ultra-light, ultra-thin, and exceptionally strength.
9. High Reliability: Fully enclosed modules with front and rear IP65 protection; hidden cabling for enhanced safety, aesthetics, and stability.
10. Applications: Ideal for outdoor advertising, government and corporate projects, cultural tourism, sports events, branding campaigns, and commercial real estate, etc.

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	4.81mm、104*52、500mm*250mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、Module Power	DC4.5V、≤84W
	Driving IC、Driving way	ICN2153S、1/13S
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、24kg/Cabinet
	Resolution rate、size、Module quantity	208*208Dots、1000*1000*90mm、2*4
	Density	43222 Dots/㎡
	White balance 、Color temperature	5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤675w/㎡、≤225w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、Front/Back：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	100kg （Estimated data,4pcs /Case）
Outer Package Size	1100*580*1200mm （Estimated data,4pcs /Case）
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

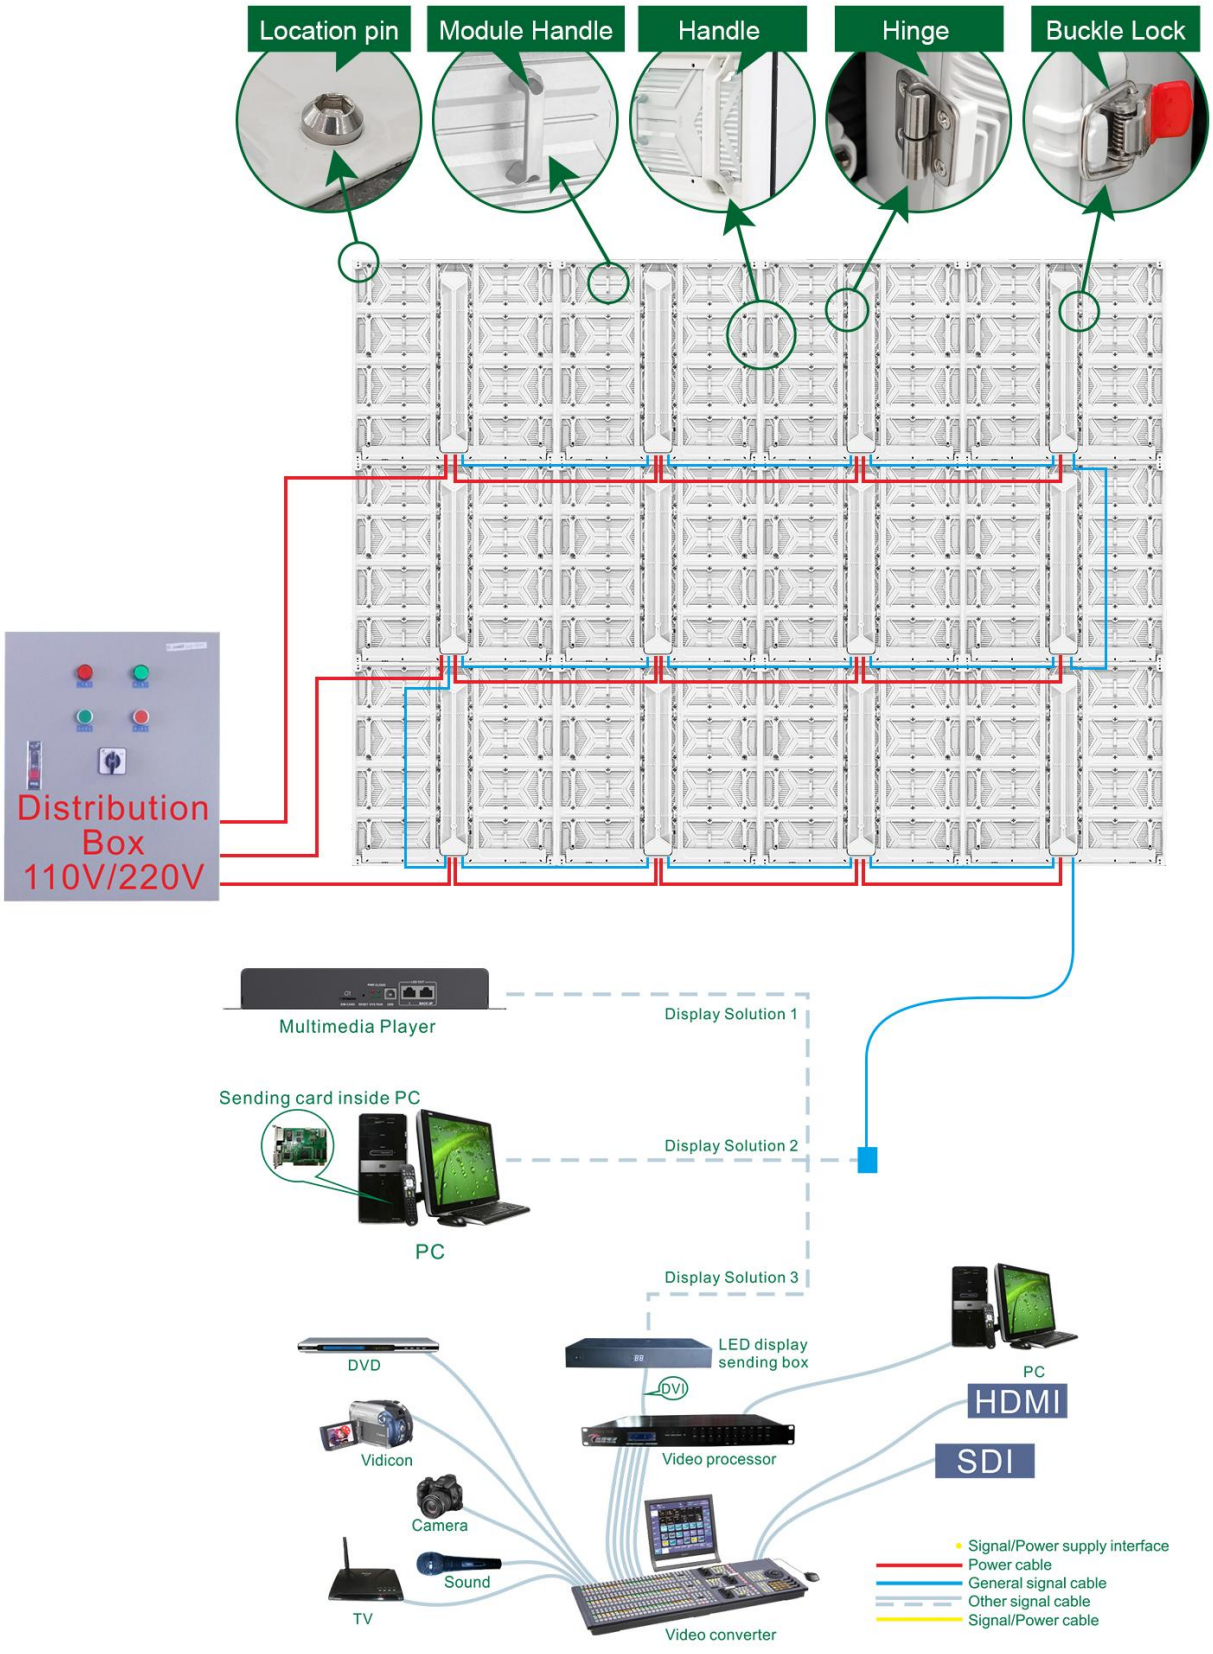

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P4 - 960 * 960 Magnesium Alloy full color LED display

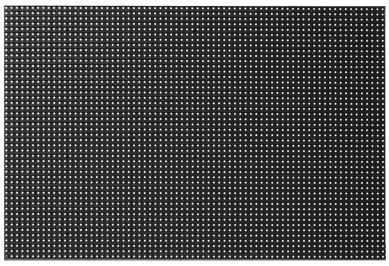


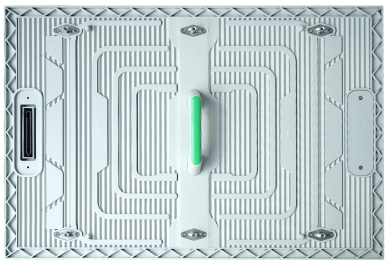

Module

Cabinet



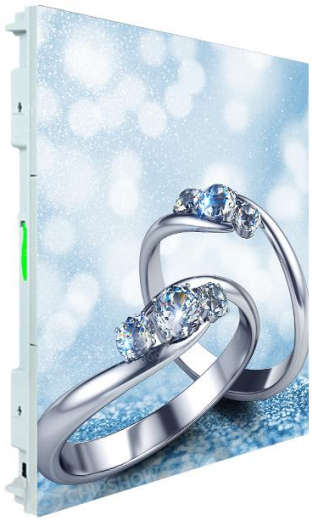

1、The common cathode scheme is adopted,30% energy saving compared with traditional LED display;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、 The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable;

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、 Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL： 86-755-83419012 FAX： 86-755-82975893
E-mail: manager@chipshow.com
WEB： www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	4mm、120*80Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、Module Power	DC3.2V，DC4.2V、≤95W
	Driving IC、Driving way	ICN2153S、1/8
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、25kg/Cabinet
	Resolution rate、size、Module quantity	240*240Dots、960*960*95mm、2X3
	Density	62500 Dots/㎡
	White balance 、Color temperature	5000 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120° /120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤615W/㎡、≤205W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	115kg （Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150mm （Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

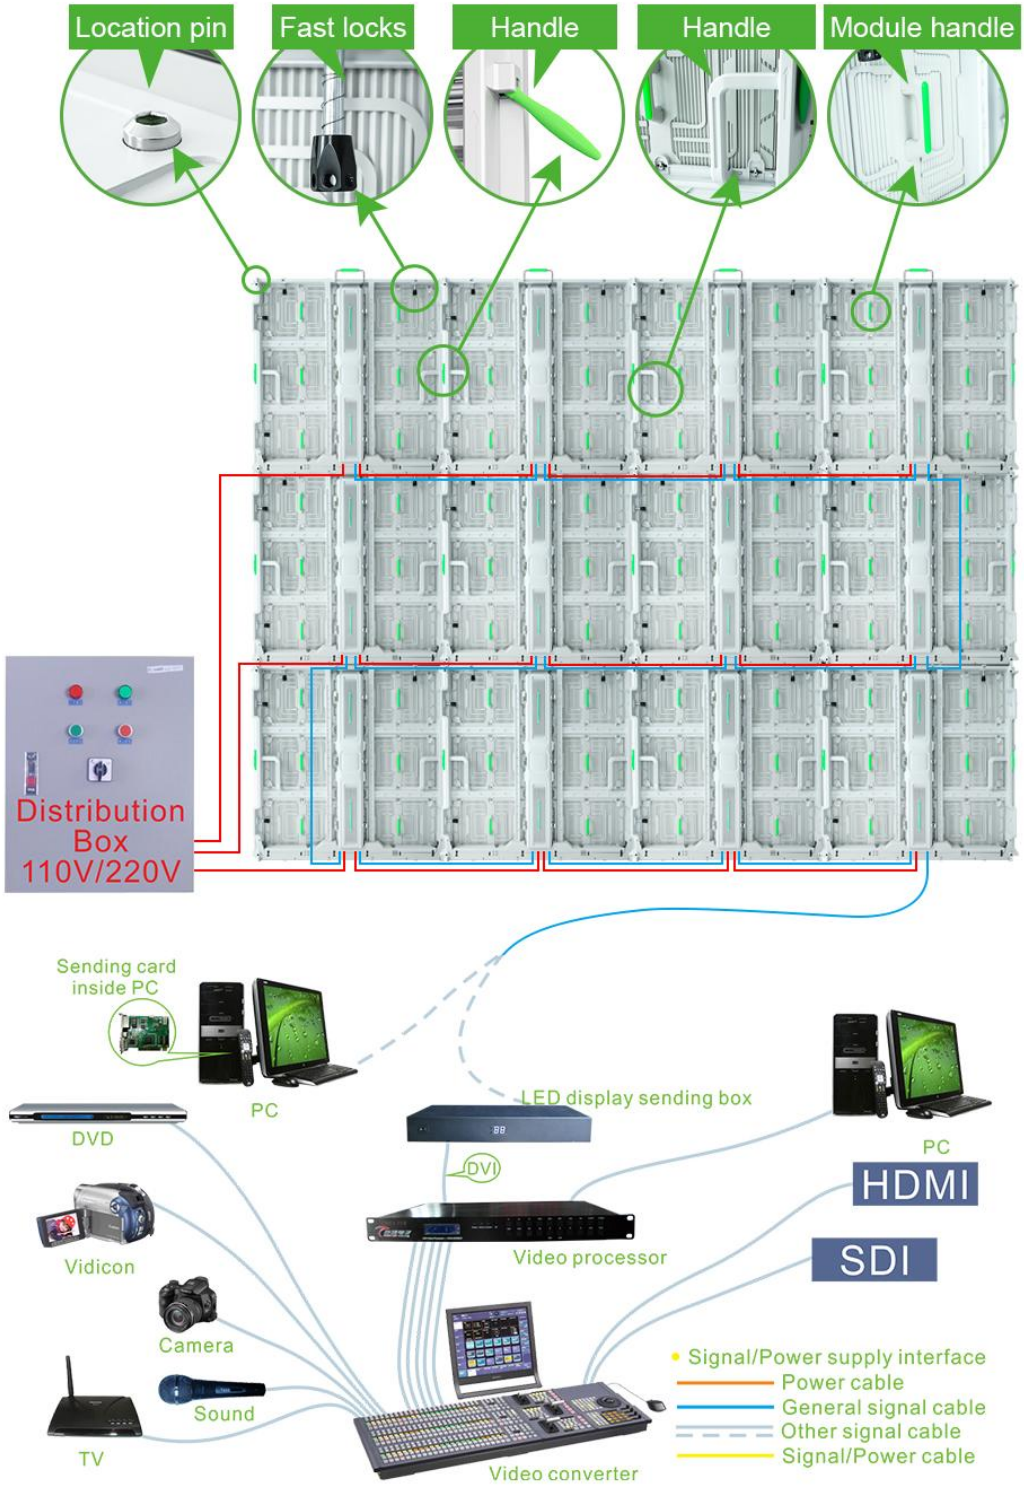

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P4 - 480*640 Magnesium Alloy full color LED display

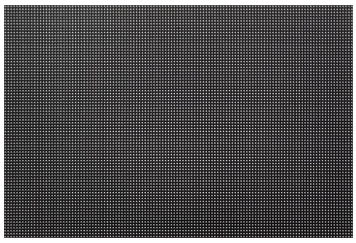

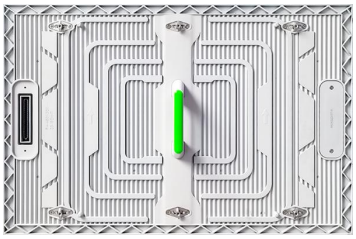

Module

Cabinet





- Front and rear maintenance: accessories can be completely front-maintained, saving space.
- Side waterproofing between module boxes, good waterproof performance
- Magnesium alloy case, ultra-light and ultra-thin with very high strength;
- IP65 protection at the front and rear of the fully enclosed module, normal operation in wind and rain weather
- Quick lock installation, using aviation head quick docking cable for quick installation
- It can be installed on the wall, and the module, power supply, and system front maintenance design can meet various wall-mounted installation conditions
- With the unit size of 480*640mm, users can get more free and flexible assembly methods, and can quickly assemble different sizes of identification signs;
- Application fields: outdoor advertising media, government and enterprise engineering, cultural tourism, sports competitions, image publicity, commercial real estate, etc.;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	4mm、120*80Dots、480*320mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、Module Power	4.2V、≤95W
	Driving IC、Driving way	ICND2153S、1/10S
	HUB	-
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium alloy、7.2kg/Cabinet
	Resolution rate、size、Module quantity	120*160Dots、480*640*71.5mm、1*2
	Density	62500 Dots/㎡
	White balance 、Color temperature	5000 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤615w/㎡、≤205w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、7860Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	- 20~50℃、 Front/Back ： IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	58kg （Estimated data,6pcs /Case）
Outer Package Size	720*630*560㎜ （Estimated data,6pcs /Case）
Packing Material	Flight cases





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

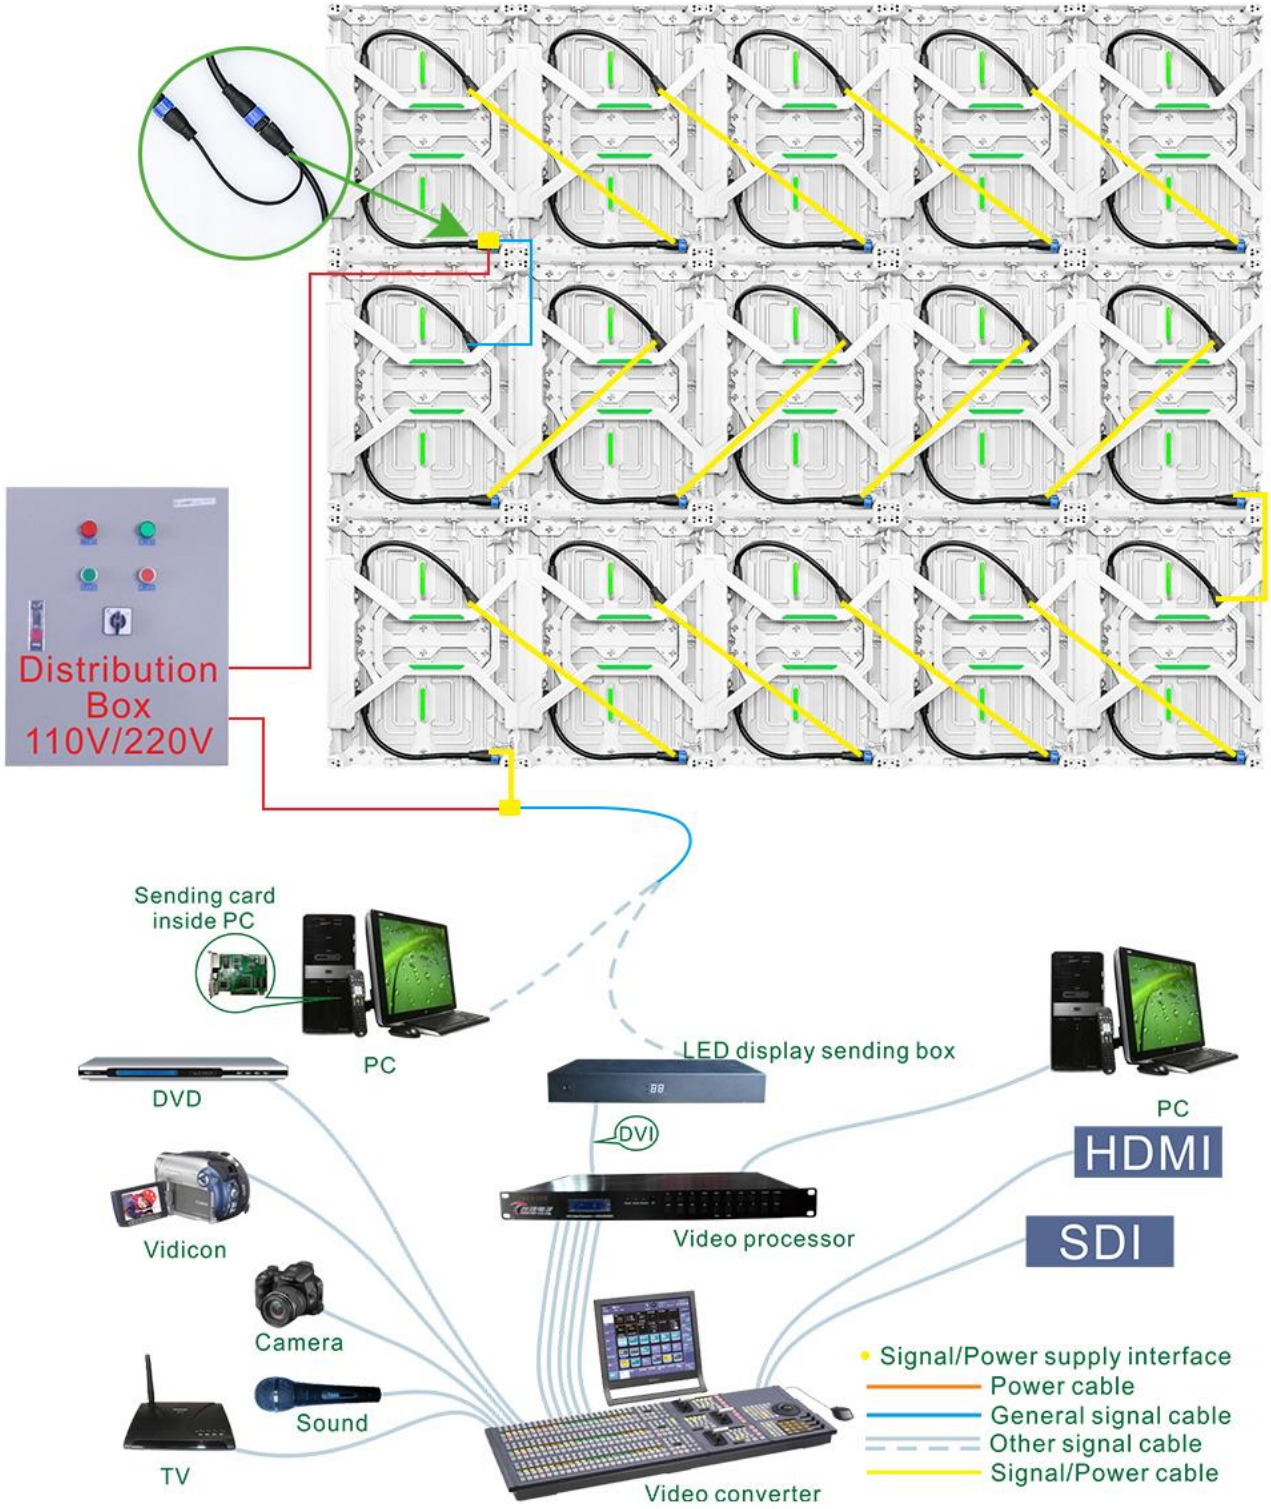

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P5 - 480*640 Magnesium Alloy full color LED display

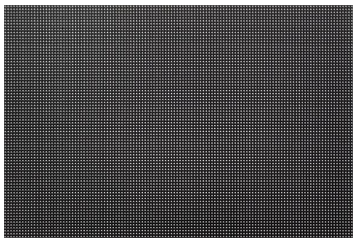

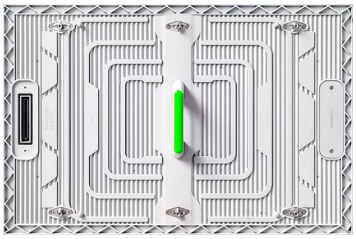

Module

Cabinet





- Front and rear maintenance: accessories can be completely front-maintained, saving space.
- Side waterproofing between module boxes, good waterproof performance
- Magnesium alloy case, ultra-light and ultra-thin with very high strength;
- IP65 protection at the front and rear of the fully enclosed module, normal operation in wind and rain weather
- Quick lock installation, using aviation head quick docking cable for quick installation
- It can be installed on the wall, and the module, power supply, and system front maintenance design can meet various wall-mounted installation conditions
- With the unit size of 480*640mm, users can get more free and flexible assembly methods, and can quickly assemble different sizes of identification signs;
- Application fields: outdoor advertising media, government and enterprise engineering, cultural tourism, sports competitions, image publicity, commercial real estate, etc.;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	5mm、96*64、480mm*320mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、Module Power	DC4.6V、≤90W
	Driving IC、Driving way	ICND2153、1/8S
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium alloy、7.2kg/Cabinet
	Resolution rate、size、Module quantity	96*128Dots、480*640*71.5mm、1*2
	Density	40000 Dots/㎡
	White balance 、Color temperature	5000 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤600w/㎡、≤200w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	- 20~50℃、 Front/Back ： IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	58kg （Estimated data,6pcs /Case）
Outer Package Size	720*630*560㎜ （Estimated data,6pcs /Case）
Packing Material	Flight cases





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

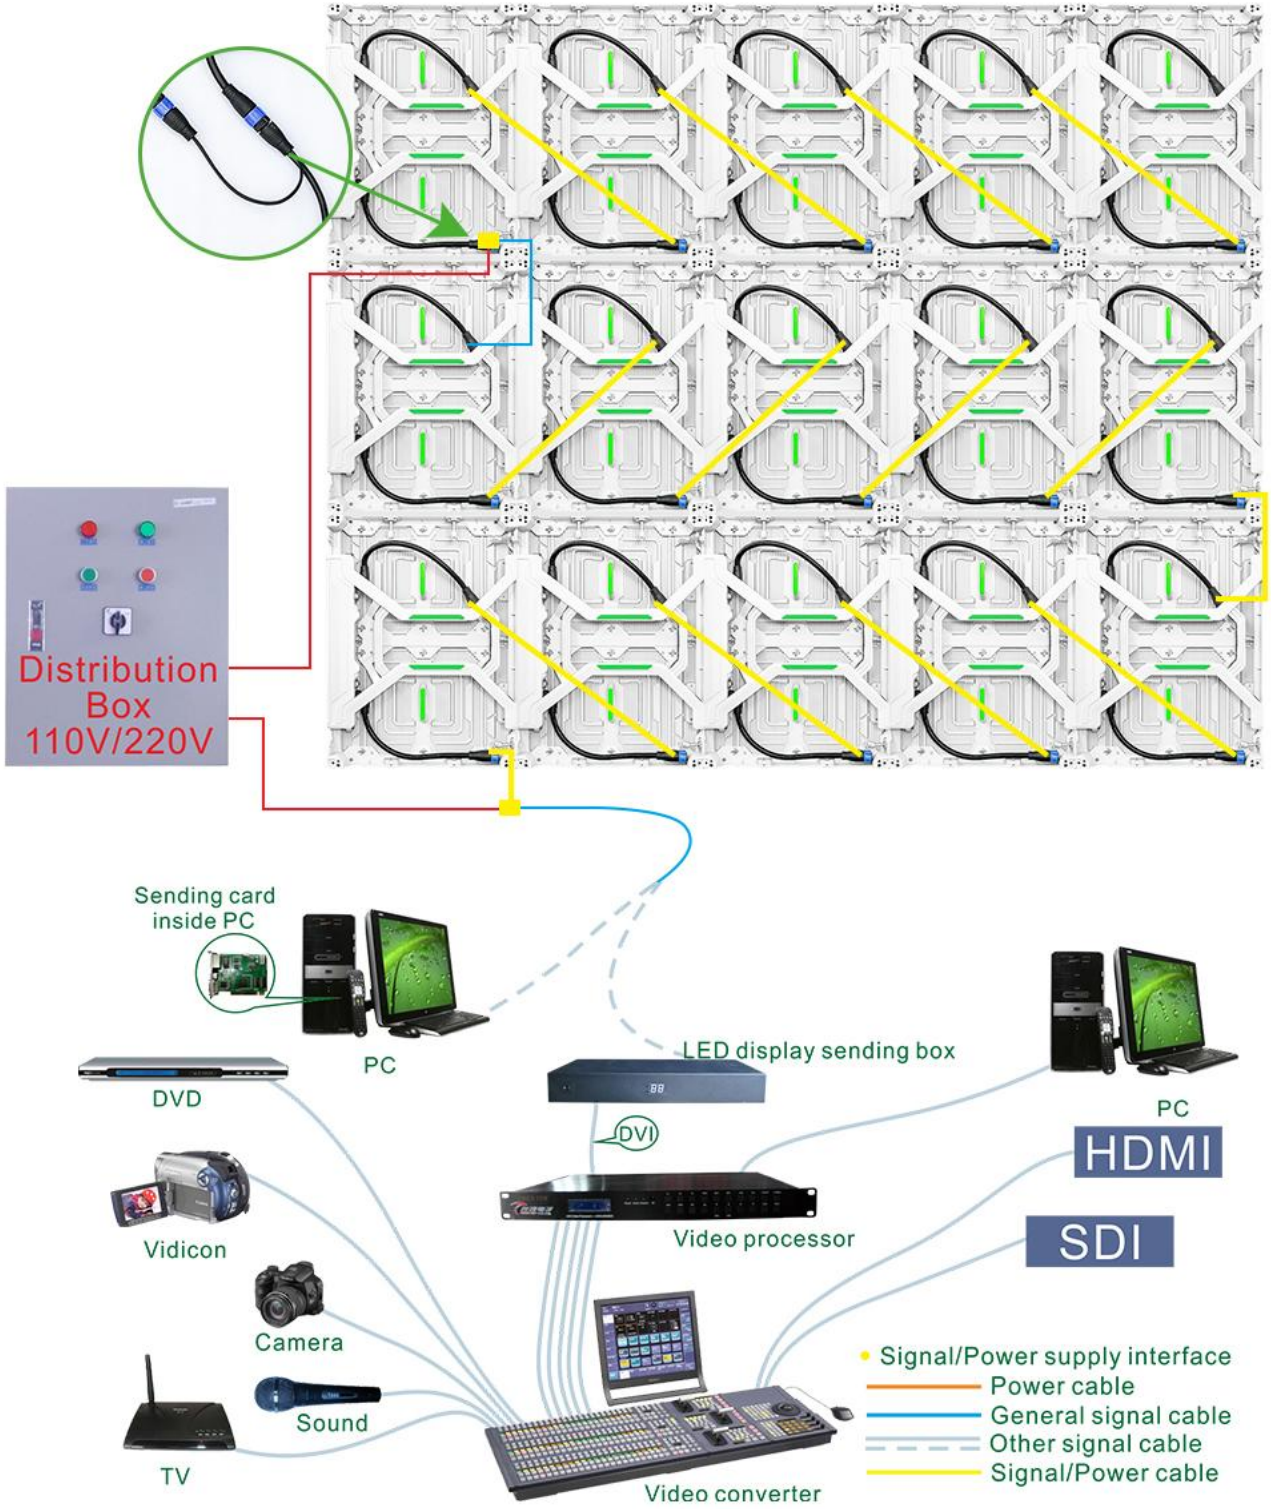

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P5 - 960 * 960 Magnesium Alloy full color LED display

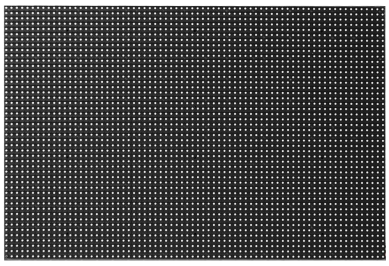


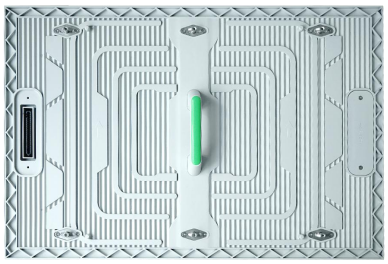

Module

Cabinet



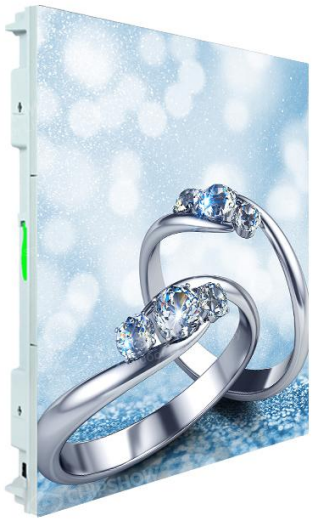

1、30% energy saving compared with traditional LED display;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable;

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	5mm、96*64Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、Module Power	DC4.6V、≤90W
	Driving IC、Driving way	ICN2153S、1/8
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、25kg/Cabinet
	Resolution rate、size、Module quantity	192*192Dots、960*960*95mm、2X3
	Density	40000 Dots/㎡
	White balance 、Color temperature	5000 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤600W/㎡、≤200W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	115kg（Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150mm（Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

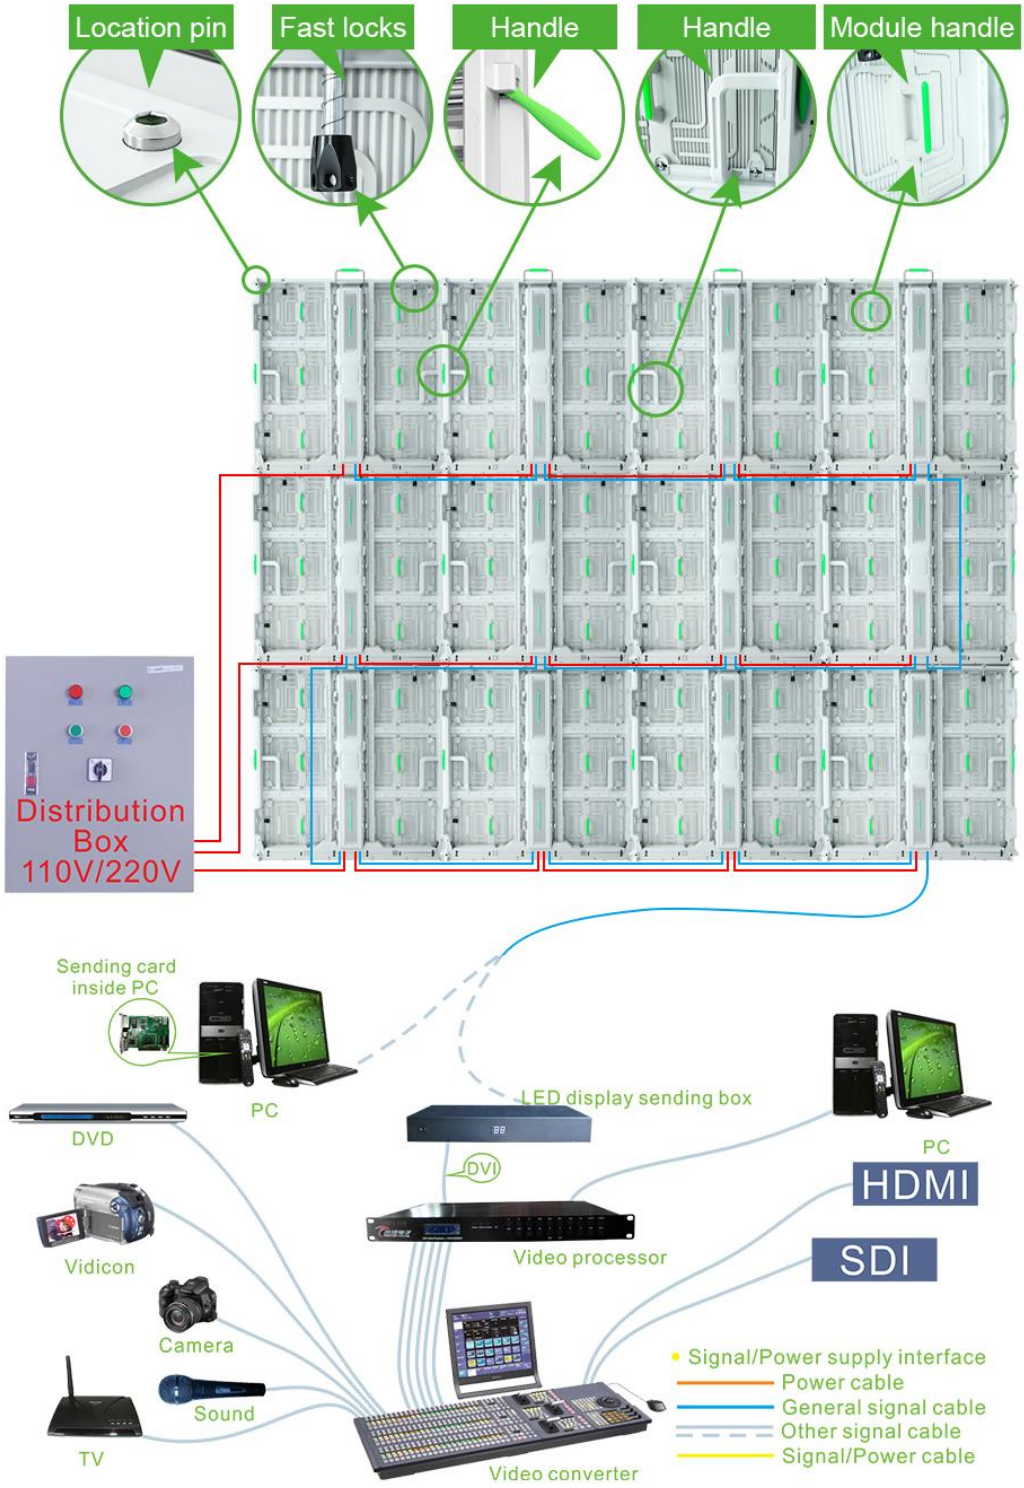

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com


P6.25 1000*1000 Outdoor Magnesium Alloy Full Color LED Screen

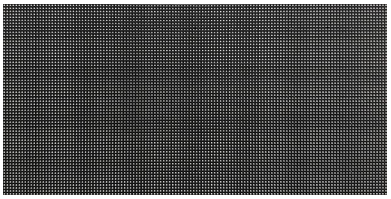

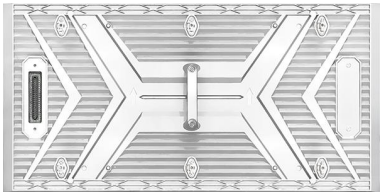

Module

Cabinet

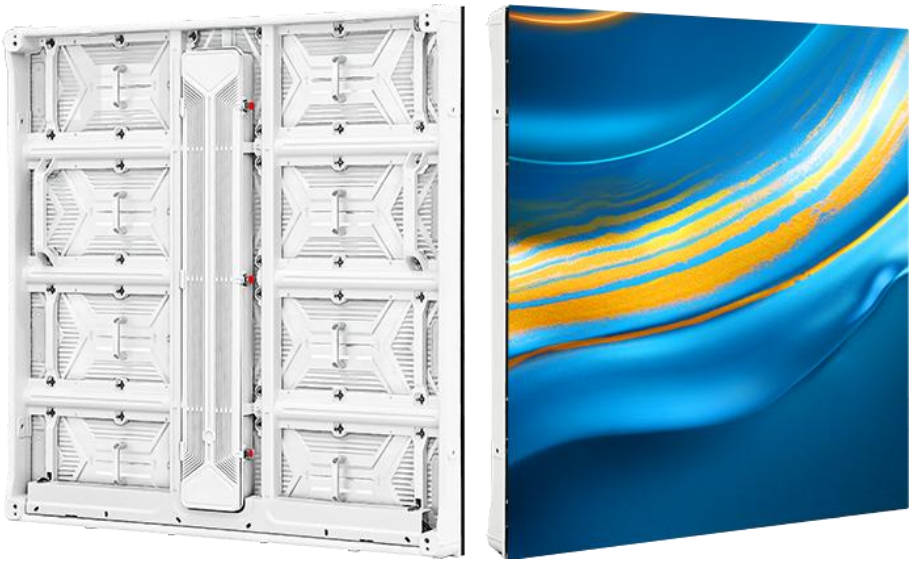

PRODUCT FEATURES

11. Front&Rear Maintenance: All components support complete front maintenance, saving space.
12. Side Waterproofing: ensures excellent protection between modules and cabinets.
13. Fully Magnesium Alloy Cabinet: Ultra-light, ultra-thin, and exceptionally strength.
14. High Reliability: Fully enclosed modules with front and rear IP65 protection; hidden cabling for enhanced safety, aesthetics, and stability.
15. Applications: Ideal for outdoor advertising, government and corporate projects, cultural tourism, sports events, branding campaigns, and commercial real estate, etc.

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	6.25mm、80*40、500mm*250mm
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC4.5V、≤79W
	Driving IC、Driving way	ICN2153S、1/5S
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、24kg/Cabinet
	Resolution rate、size、Module quantity	160*160Dots、1000*1000*90mm、2*4
	Density	25600 Dots/㎡
	White balance 、Color temperature	5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤742w/㎡、≤247w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、Front/Back：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	100kg （Estimated data,4pcs /Case）
Outer Package Size	1100*580*1200mm （Estimated data,4pcs /Case）
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

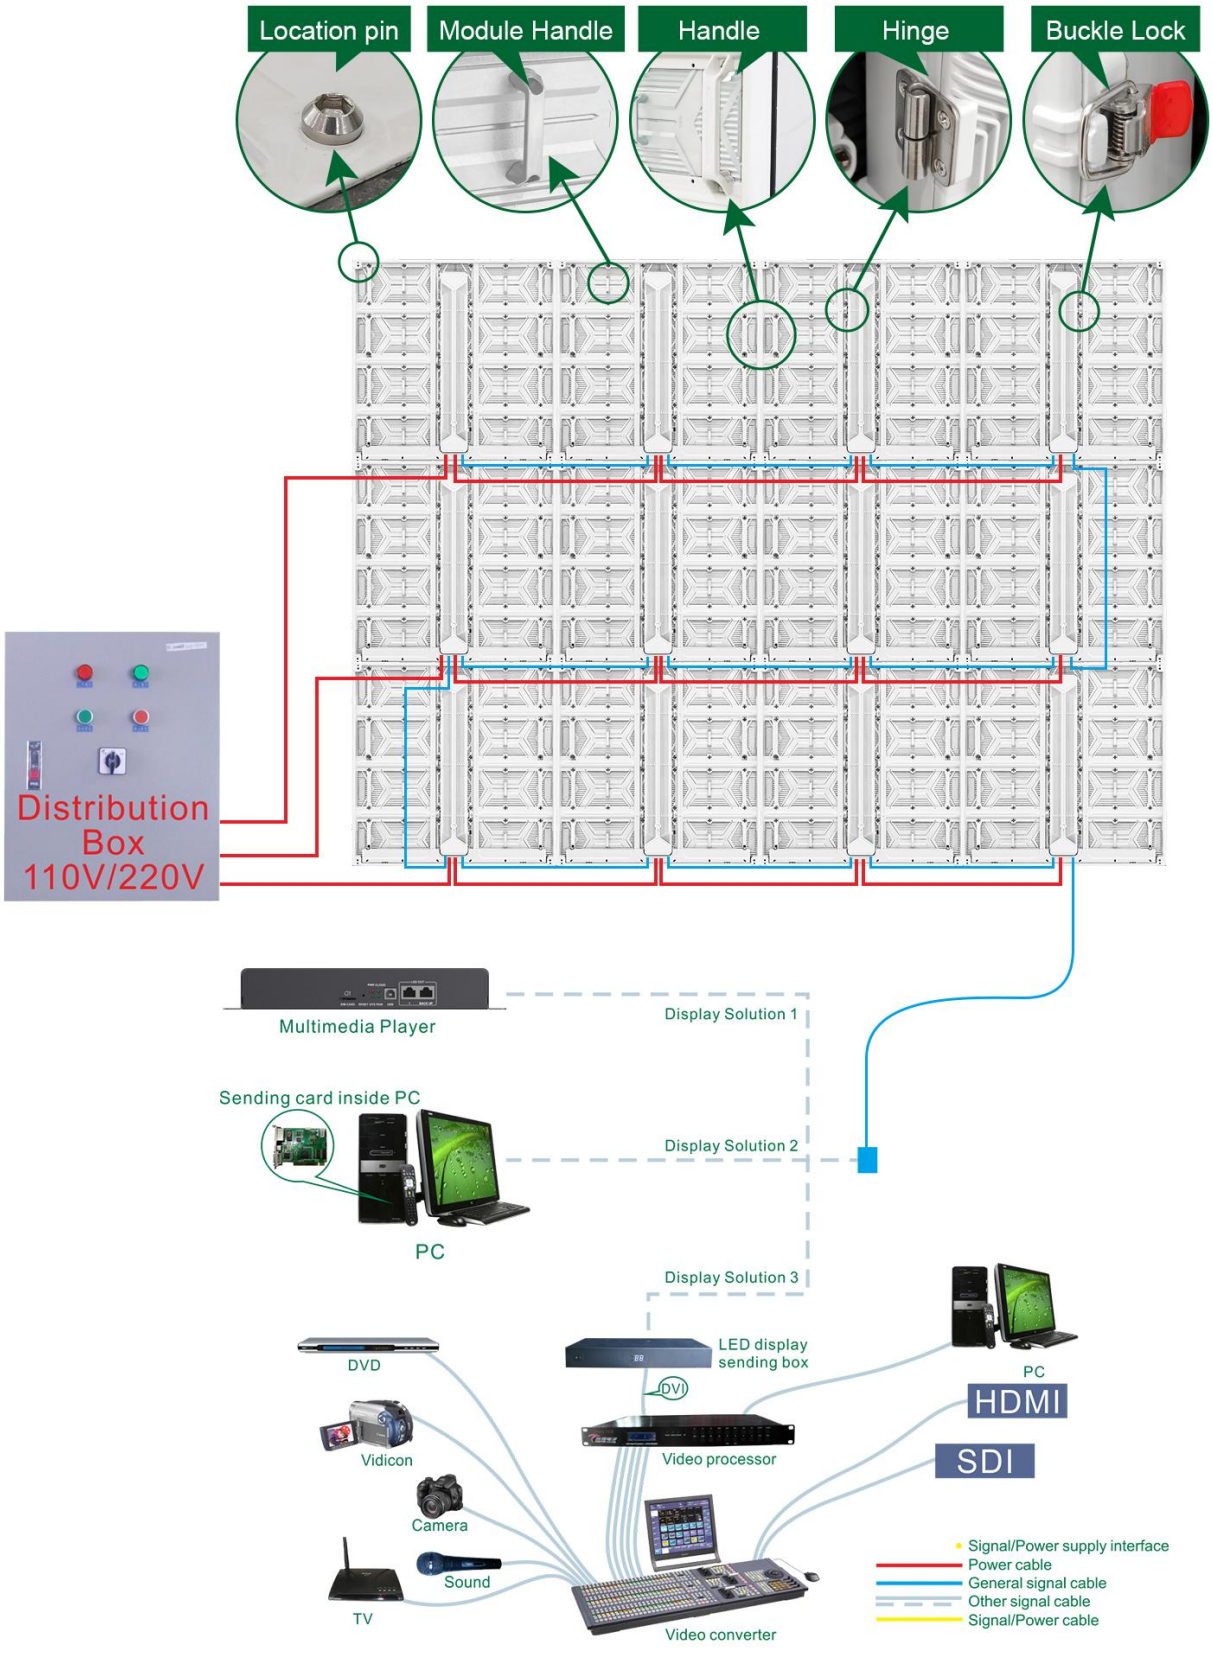

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P6.67 - 480*640 Magnesium Alloy full color LED display

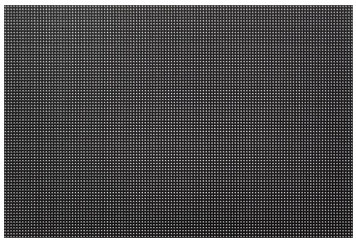

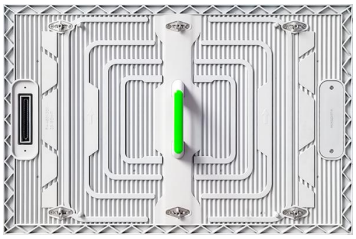

Module

Cabinet





- Front and rear maintenance: accessories can be completely front-maintained, saving space.
- Side waterproofing between module boxes, good waterproof performance
- Magnesium alloy case, ultra-light and ultra-thin with very high strength;
- IP65 protection at the front and rear of the fully enclosed module, normal operation in wind and rain weather
- Quick lock installation, using aviation head quick docking cable for quick installation
- It can be installed on the wall, and the module, power supply, and system front maintenance design can meet various wall-mounted installation conditions
- With the unit size of 480*640mm, users can get more free and flexible assembly methods, and can quickly assemble different sizes of identification signs;
- Application fields: outdoor advertising media, government and enterprise engineering, cultural tourism, sports competitions, image publicity, commercial real estate, etc.;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	6.67mm、72*48Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC4.6V、≤65W
	Driving IC、Driving way	ICND1069AP、1/6
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium alloy、7.2kg/Cabinet
	Resolution rate、size、Module quantity	72*96Dots、480*640*71.5mm、1*2
	Density	22477 Dots/㎡
	White balance 、Color temperature	5000-5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤500W/㎡、≤150W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	- 20~50℃、 Front/Back ： IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	58kg （Estimated data,6pcs /Case）
Outer Package Size	720*630*560㎜ （Estimated data,6pcs /Case）
Packing Material	Flight cases





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

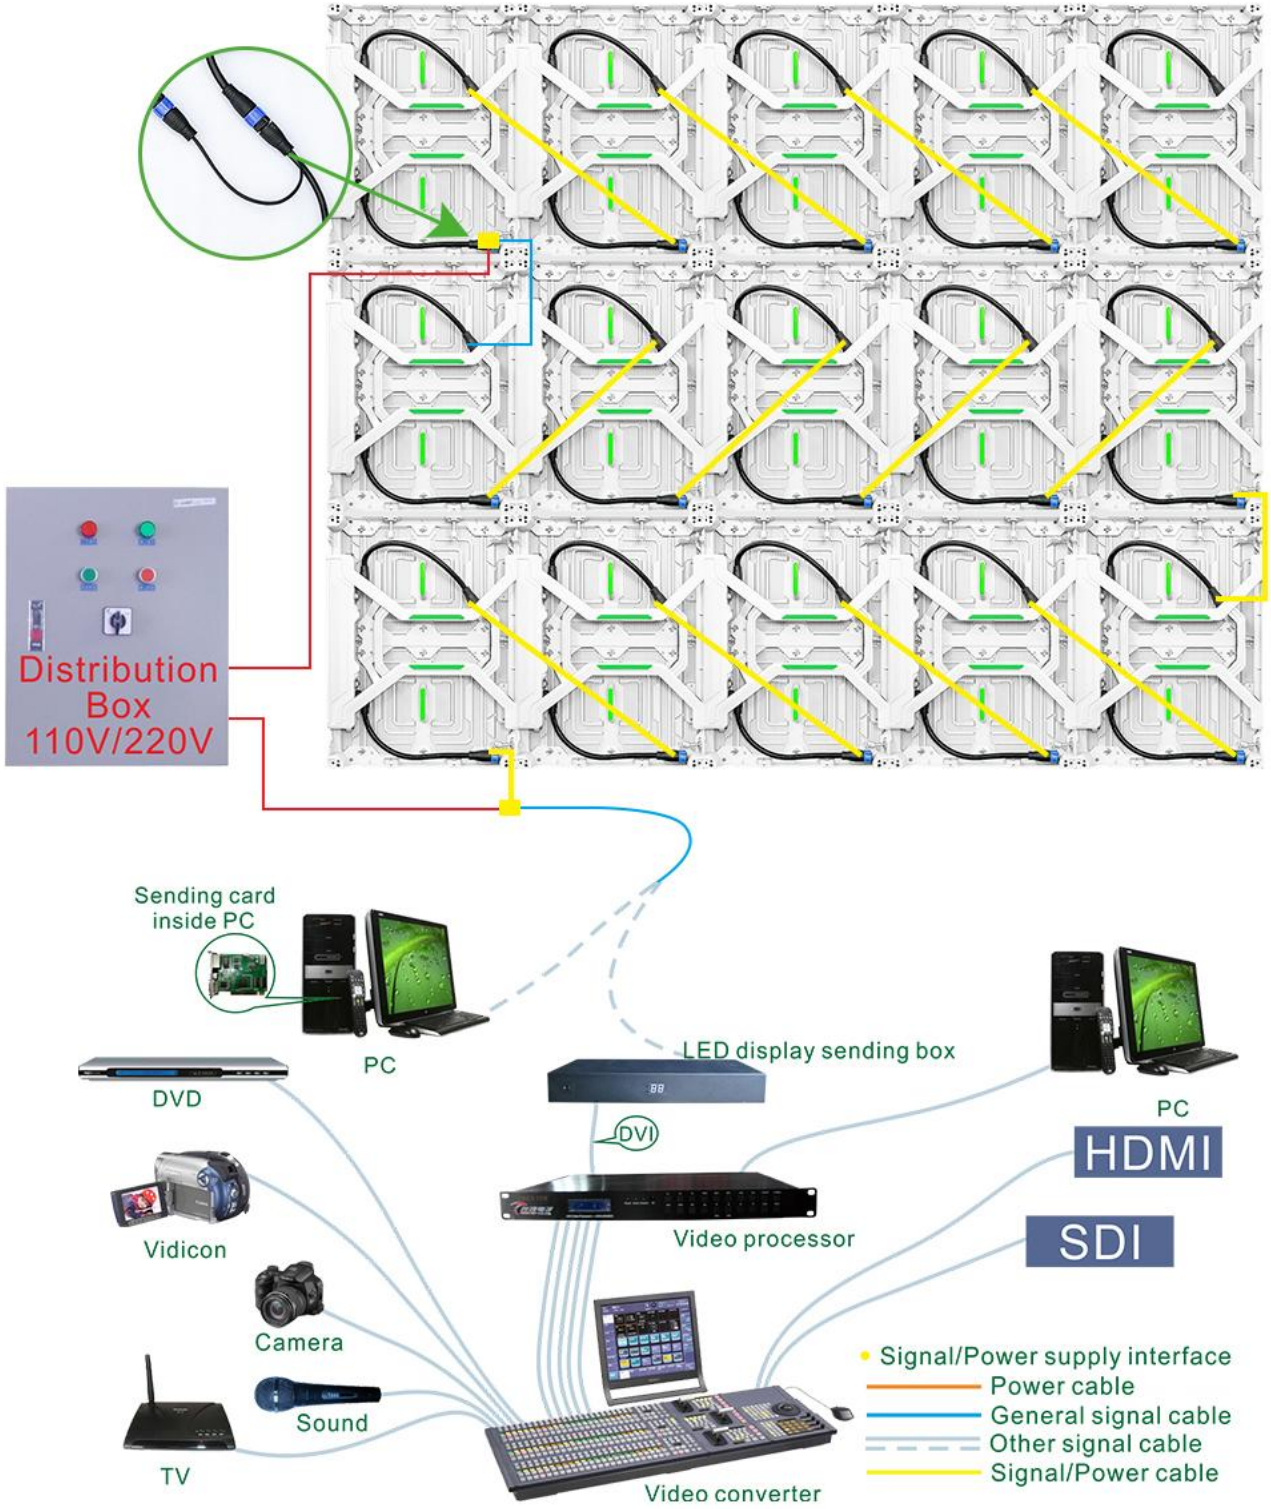

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P6.67 - 960 * 960 Magnesium Alloy full color LED display

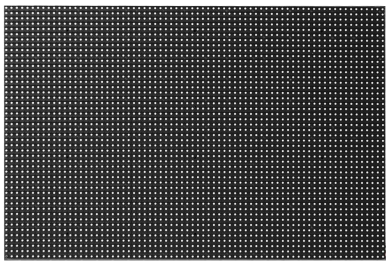


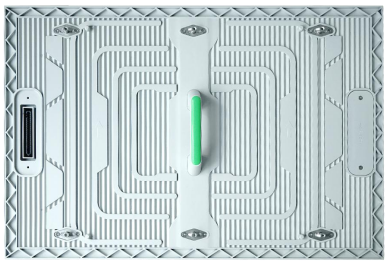

Module

Cabinet



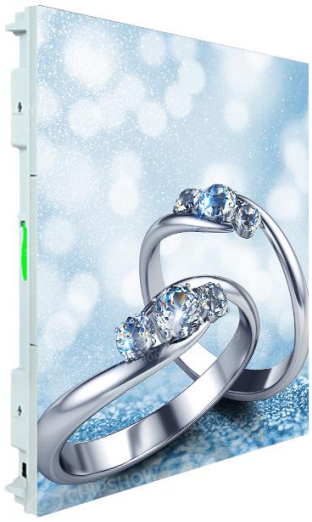

1、The common cathode scheme is adopted,30% energy saving compared with traditional LED display;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、 The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable;

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、 Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	6.67mm、72*48Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC3.2，4.2V、≤65W
	Driving IC、Driving way	ICND1069AP、1/6
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、25kg/Cabinet
	Resolution rate、size、Module quantity	144*144Dots、960*960*95mm、2X3
	Density	22477 Dots/㎡
	White balance 、Color temperature	5000-5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120° /120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤500W/㎡、≤150W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	115kg （Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150mm （Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

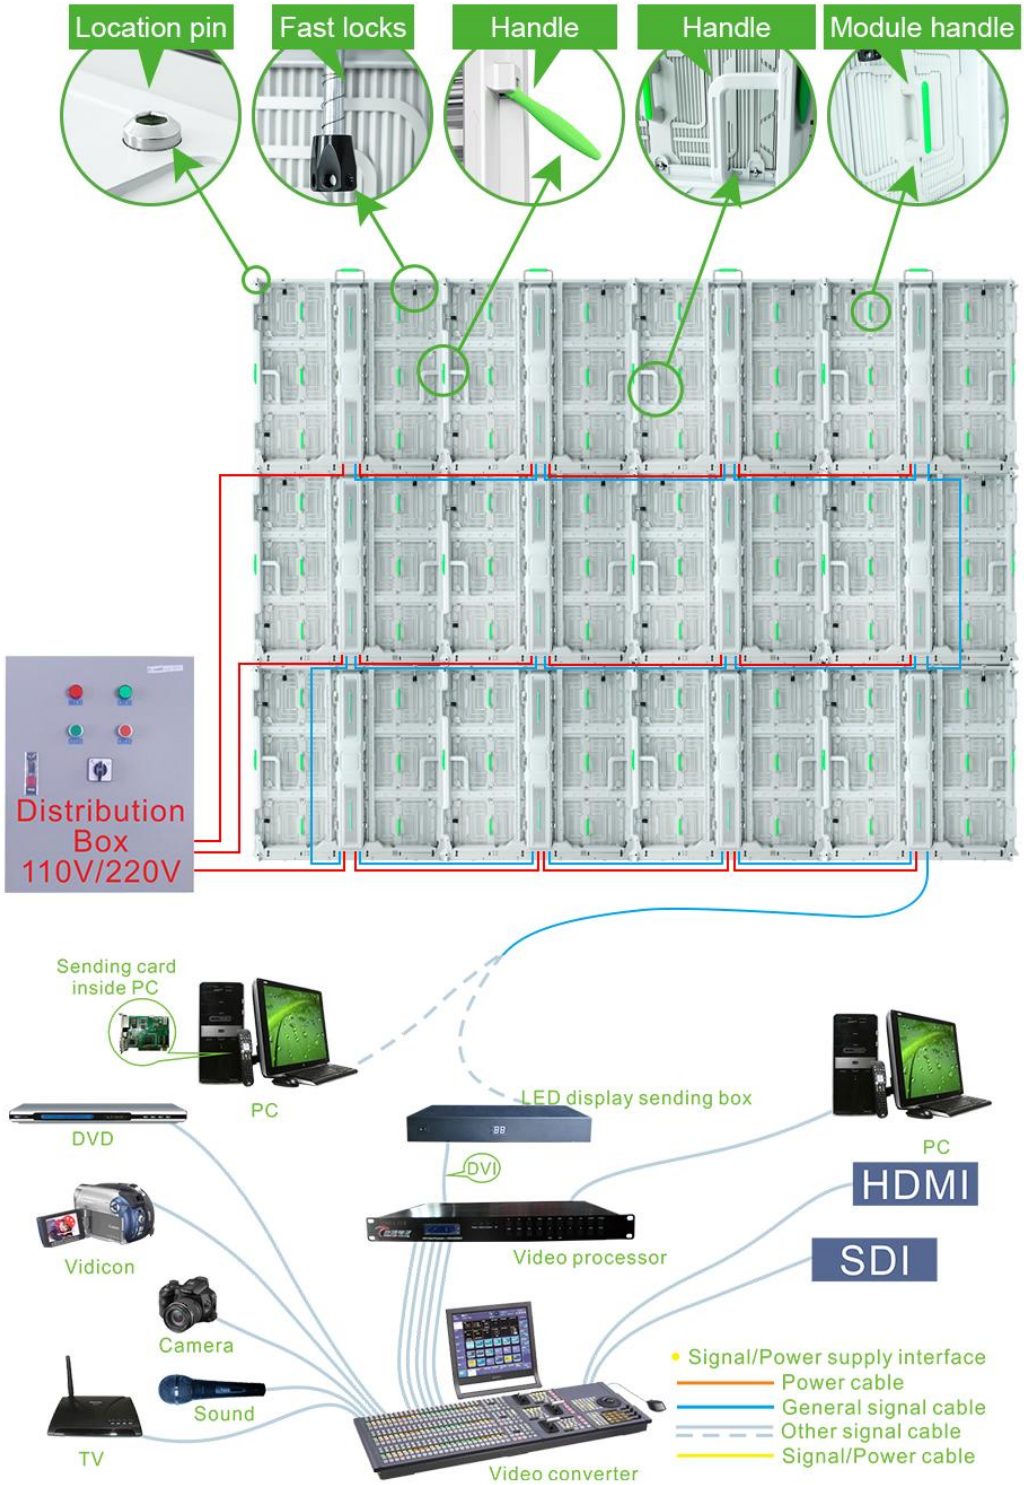

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com


P7.81 1000*1000 Outdoor Magnesium Alloy Full Color LED Screen

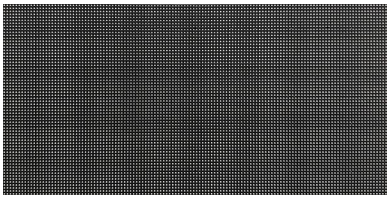

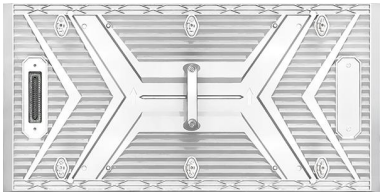

Module

Cabinet

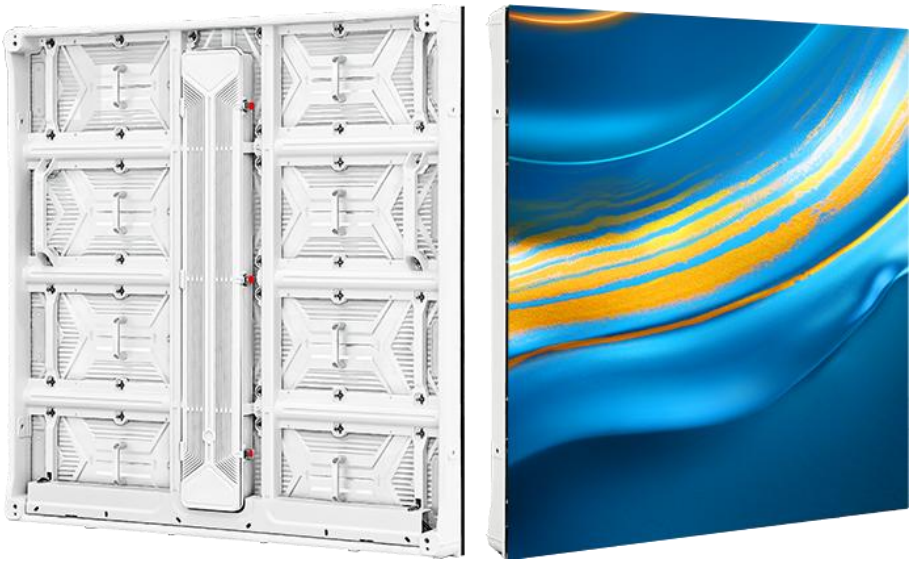

PRODUCT FEATURES

16. Front&Rear Maintenance: All components support complete front maintenance, saving space.
17. Side Waterproofing: ensures excellent protection between modules and cabinets.
18. Fully Magnesium Alloy Cabinet: Ultra-light, ultra-thin, and exceptionally strength.
19. High Reliability: Fully enclosed modules with front and rear IP65 protection; hidden cabling for enhanced safety, aesthetics, and stability.
20. Applications: Ideal for outdoor advertising, government and corporate projects, cultural tourism, sports events, branding campaigns, and commercial real estate, etc.

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	7.81mm、64*32、500mm*250mm
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC4.5V、≤67W
	Driving IC、Driving way	ICN2153S、1/4S
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、24kg/Cabinet
	Resolution rate、size、Module quantity	128*128Dots、1000*1000*90mm、2*4
	Density	16394 Dots/㎡
	White balance 、Color temperature	5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤540w/㎡、≤180w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、Front/Back：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	100kg （Estimated data,4pcs /Case）
Outer Package Size	1100*580*1200mm （Estimated data,4pcs /Case）
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

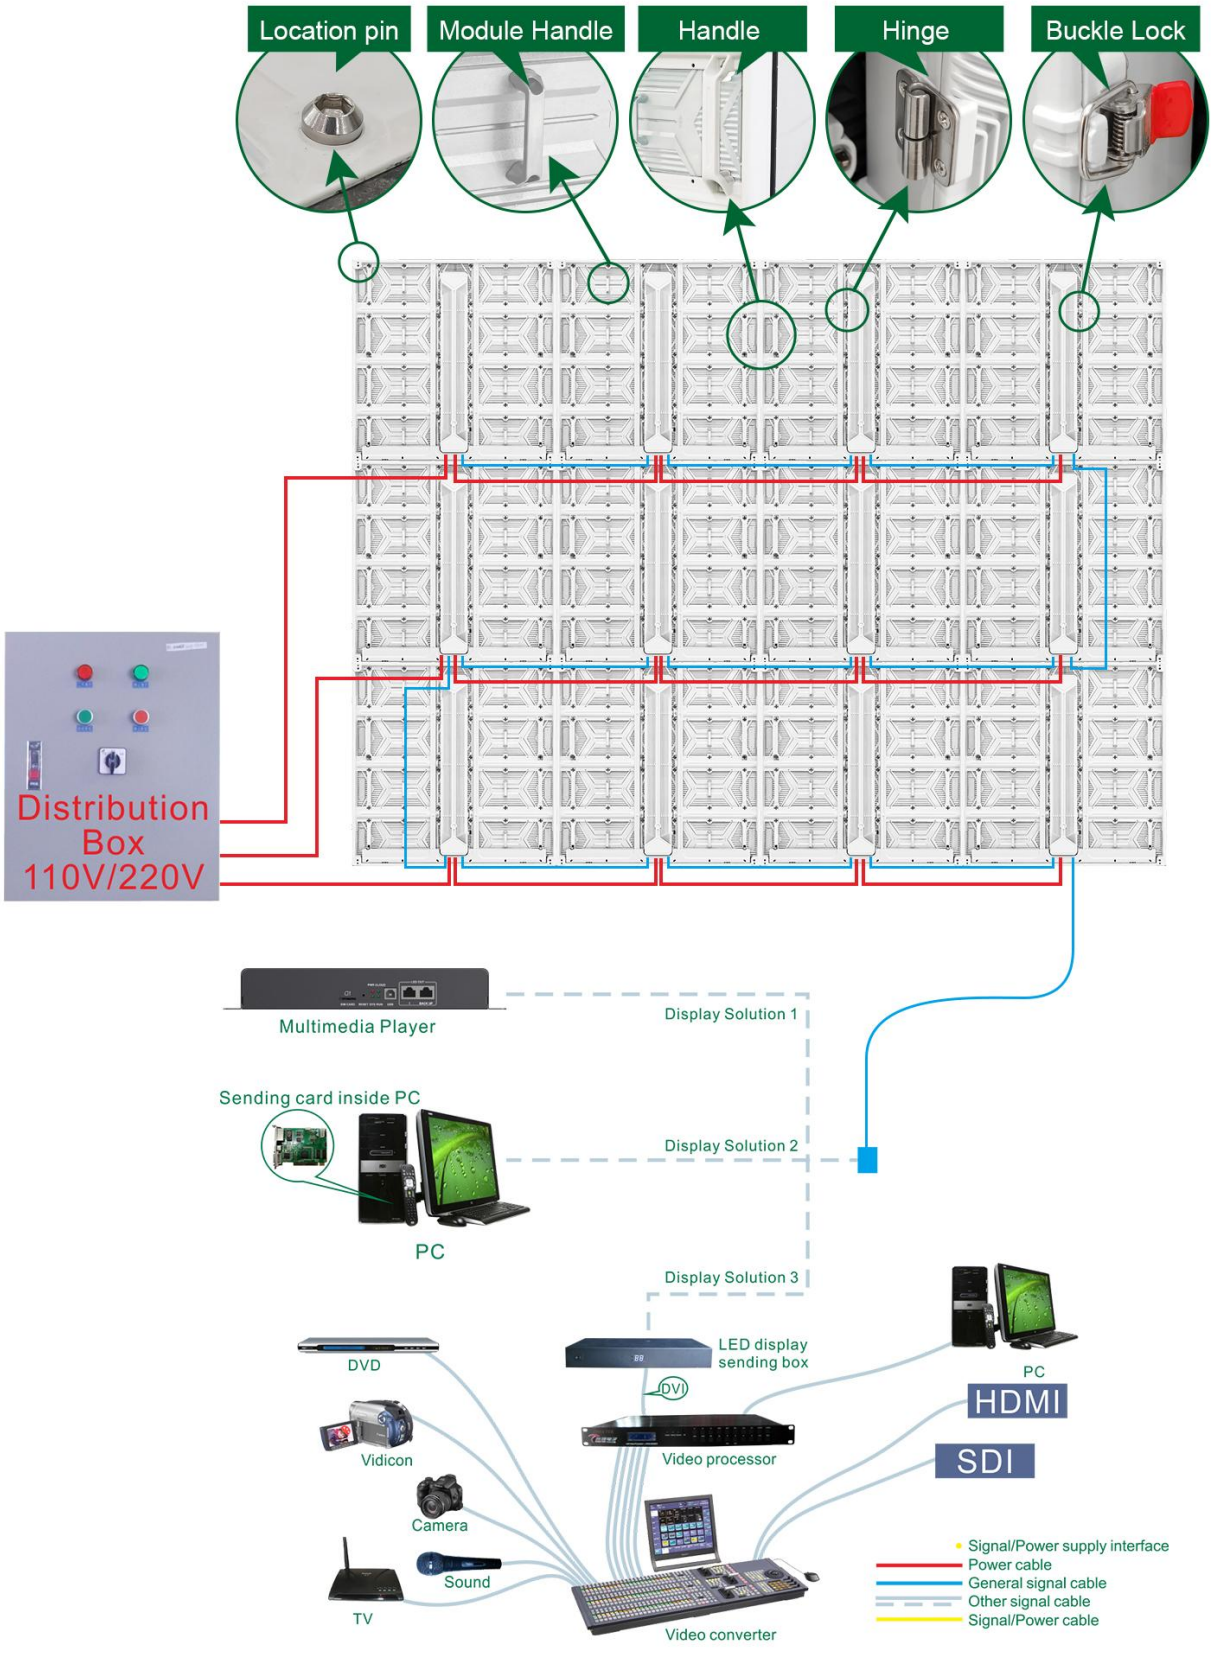

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P8 - 480*640 Magnesium Alloy full color LED display

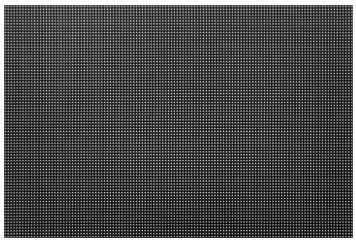

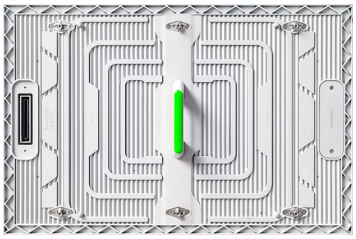

Module

Cabinet





- Front and rear maintenance: accessories can be completely front-maintained, saving space.
- Side waterproofing between module boxes, good waterproof performance
- Magnesium alloy case, ultra-light and ultra-thin with very high strength;
- IP65 protection at the front and rear of the fully enclosed module, normal operation in wind and rain weather
- Quick lock installation, using aviation head quick docking cable for quick installation
- It can be installed on the wall, and the module, power supply, and system front maintenance design can meet various wall-mounted installation conditions
- With the unit size of 480*640mm, users can get more free and flexible assembly methods, and can quickly assemble different sizes of identification signs;
- Application fields: outdoor advertising media, government and enterprise engineering, cultural tourism, sports competitions, image publicity, commercial real estate, etc.;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	8mm、60*40Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC4.6V、≤65W
	Driving IC、Driving way	ICND1069AP、1/4
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium alloy、7.2kg/Cabinet
	Resolution rate、size、Module quantity	60*80Dots、480*640*71.5mm、1*2
	Density	15625 Dots/㎡
	White balance 、Color temperature	5000-5500 CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤500W/㎡、≤150W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	- 20~50℃、 Front/Back ： IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	58kg （Estimated data,6pcs /Case）
Outer Package Size	720*630*560㎜ （Estimated data,6pcs /Case）
Packing Material	Flight cases





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

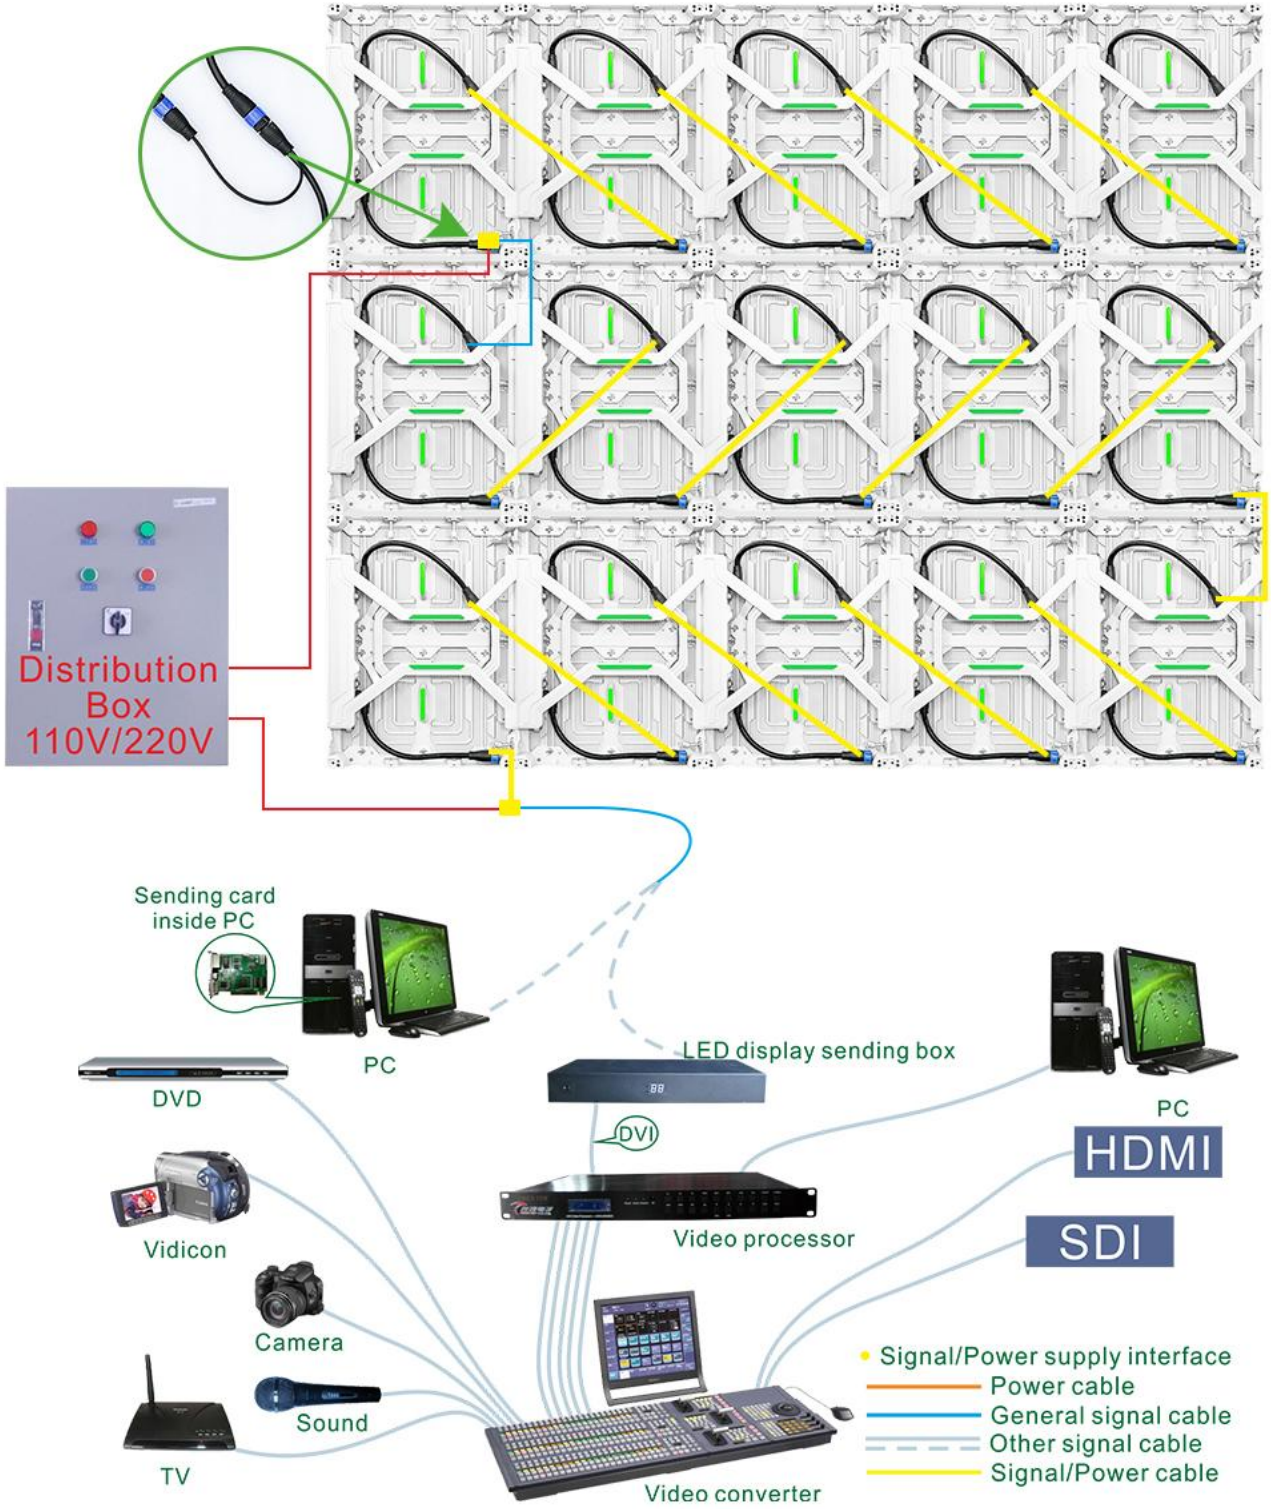

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P8 - 960 * 960 Magnesium Alloy full color LED display

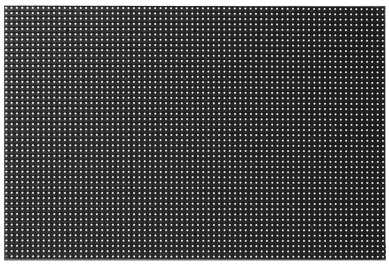


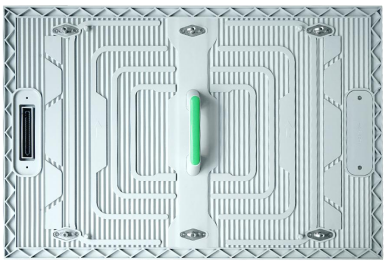

Module

Cabinet



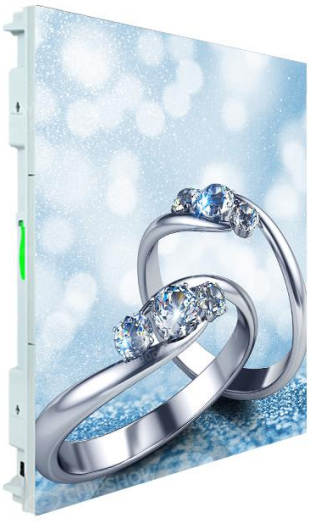

1、The common cathode scheme is adopted,30% energy saving compared with traditional LED display;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable;

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	8mm、60*40Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC3.2，4.2V、≤65W
	Driving IC、Driving way	ICND1069AP、1/4
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、25kg/Cabinet
	Resolution rate、size、Module quantity	120*120Dots、960*960*95mm、2X3
	Density	15625 Dots/㎡
	White balance 、Color temperature	5000-5500CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤500W/㎡、≤150W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：


Gross Weight（kg）	115kg （Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150mm （Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton




Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

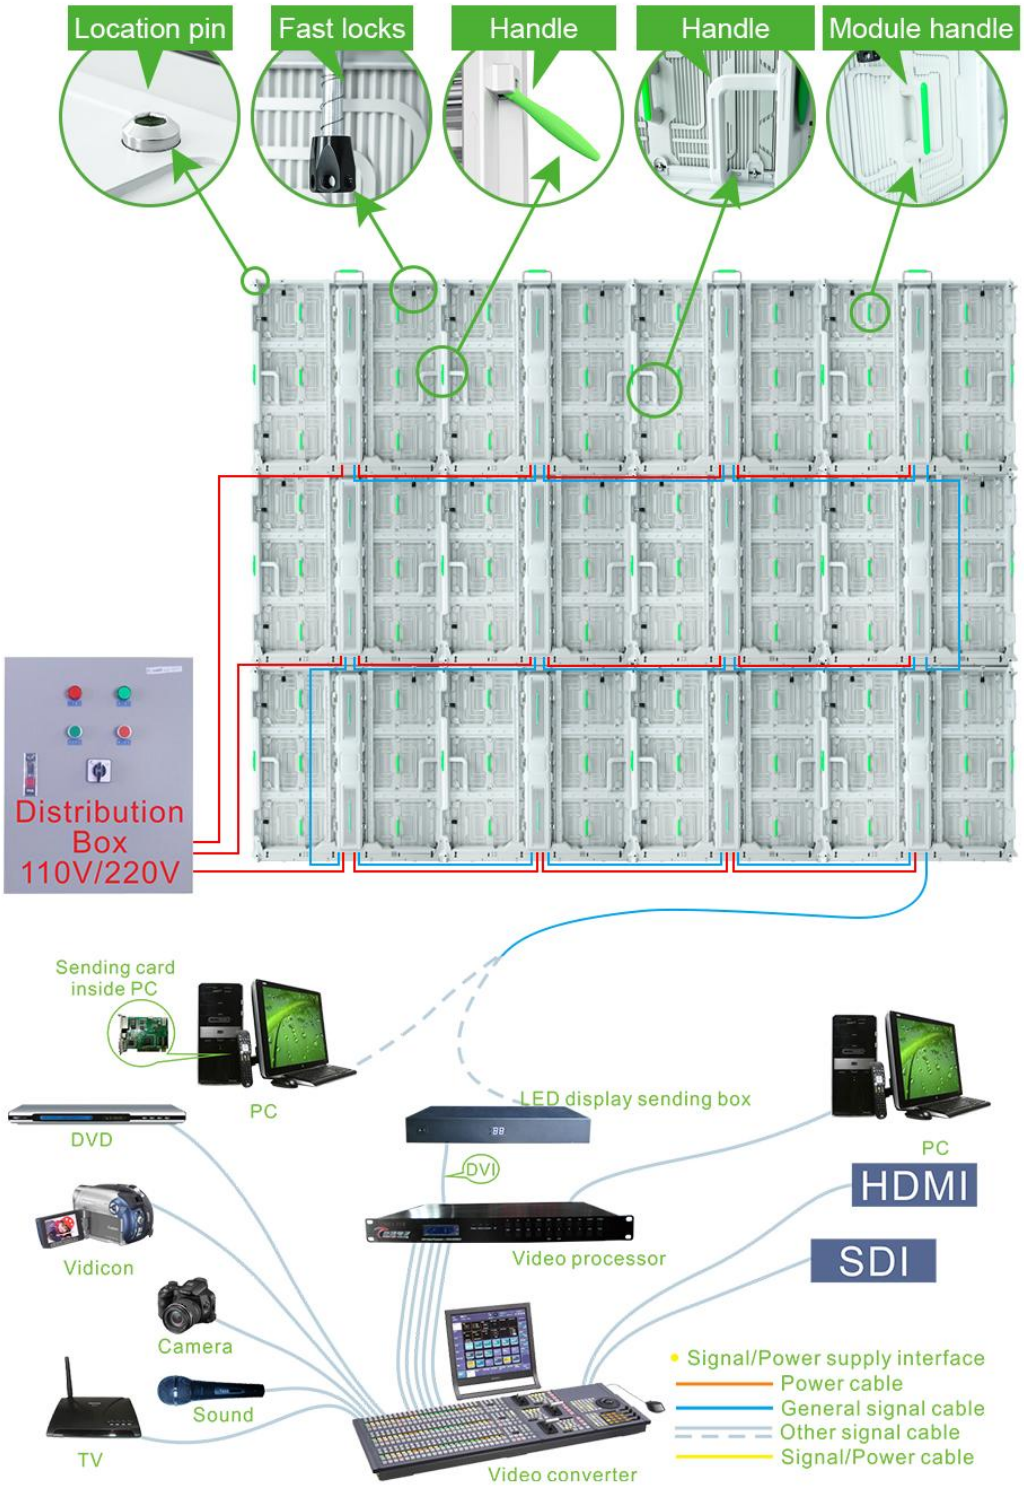


P10.42 1000*1000 Outdoor Magnesium Alloy Full Color LED Screen

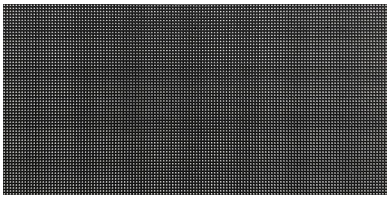

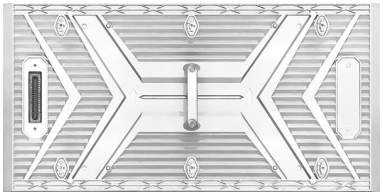

Module

Cabinet

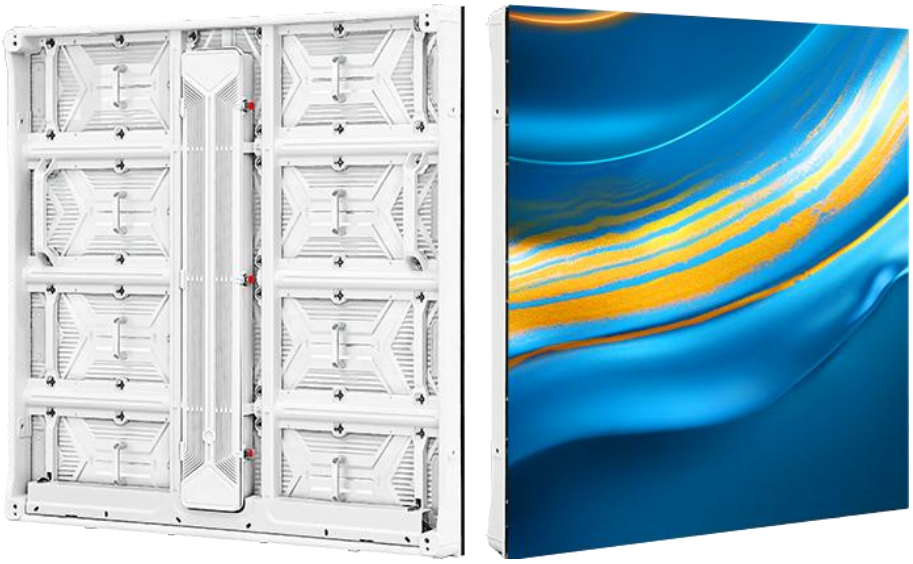

PRODUCT FEATURES

21. Front&Rear Maintenance: All components support complete front maintenance, saving space.
22. Side Waterproofing: ensures excellent protection between modules and cabinets.
23. Fully Magnesium Alloy Cabinet: Ultra-light, ultra-thin, and exceptionally strength.
24. High Reliability: Fully enclosed modules with front and rear IP65 protection; hidden cabling for enhanced safety, aesthetics, and stability.
25. Applications: Ideal for outdoor advertising, government and corporate projects, cultural tourism, sports events, branding campaigns, and commercial real estate, etc.

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	10.42mm、48*24、500mm*250mm
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC4.5V、≤72W
	Driving IC、Driving way	ICN2153S、1/2S
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、24kg/Cabinet
	Resolution rate、size、Module quantity	96*96Dots、1000*1000*90mm、2*4
	Density	9210 Dots/㎡
	White balance 、Color temperature	5500 CD/㎡、6000K-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤576w/㎡、≤192w/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840~7680Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、Front/Back：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	100kg （Estimated data,4pcs /Case）
Outer Package Size	1100*580*1200mm （Estimated data,4pcs /Case）
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

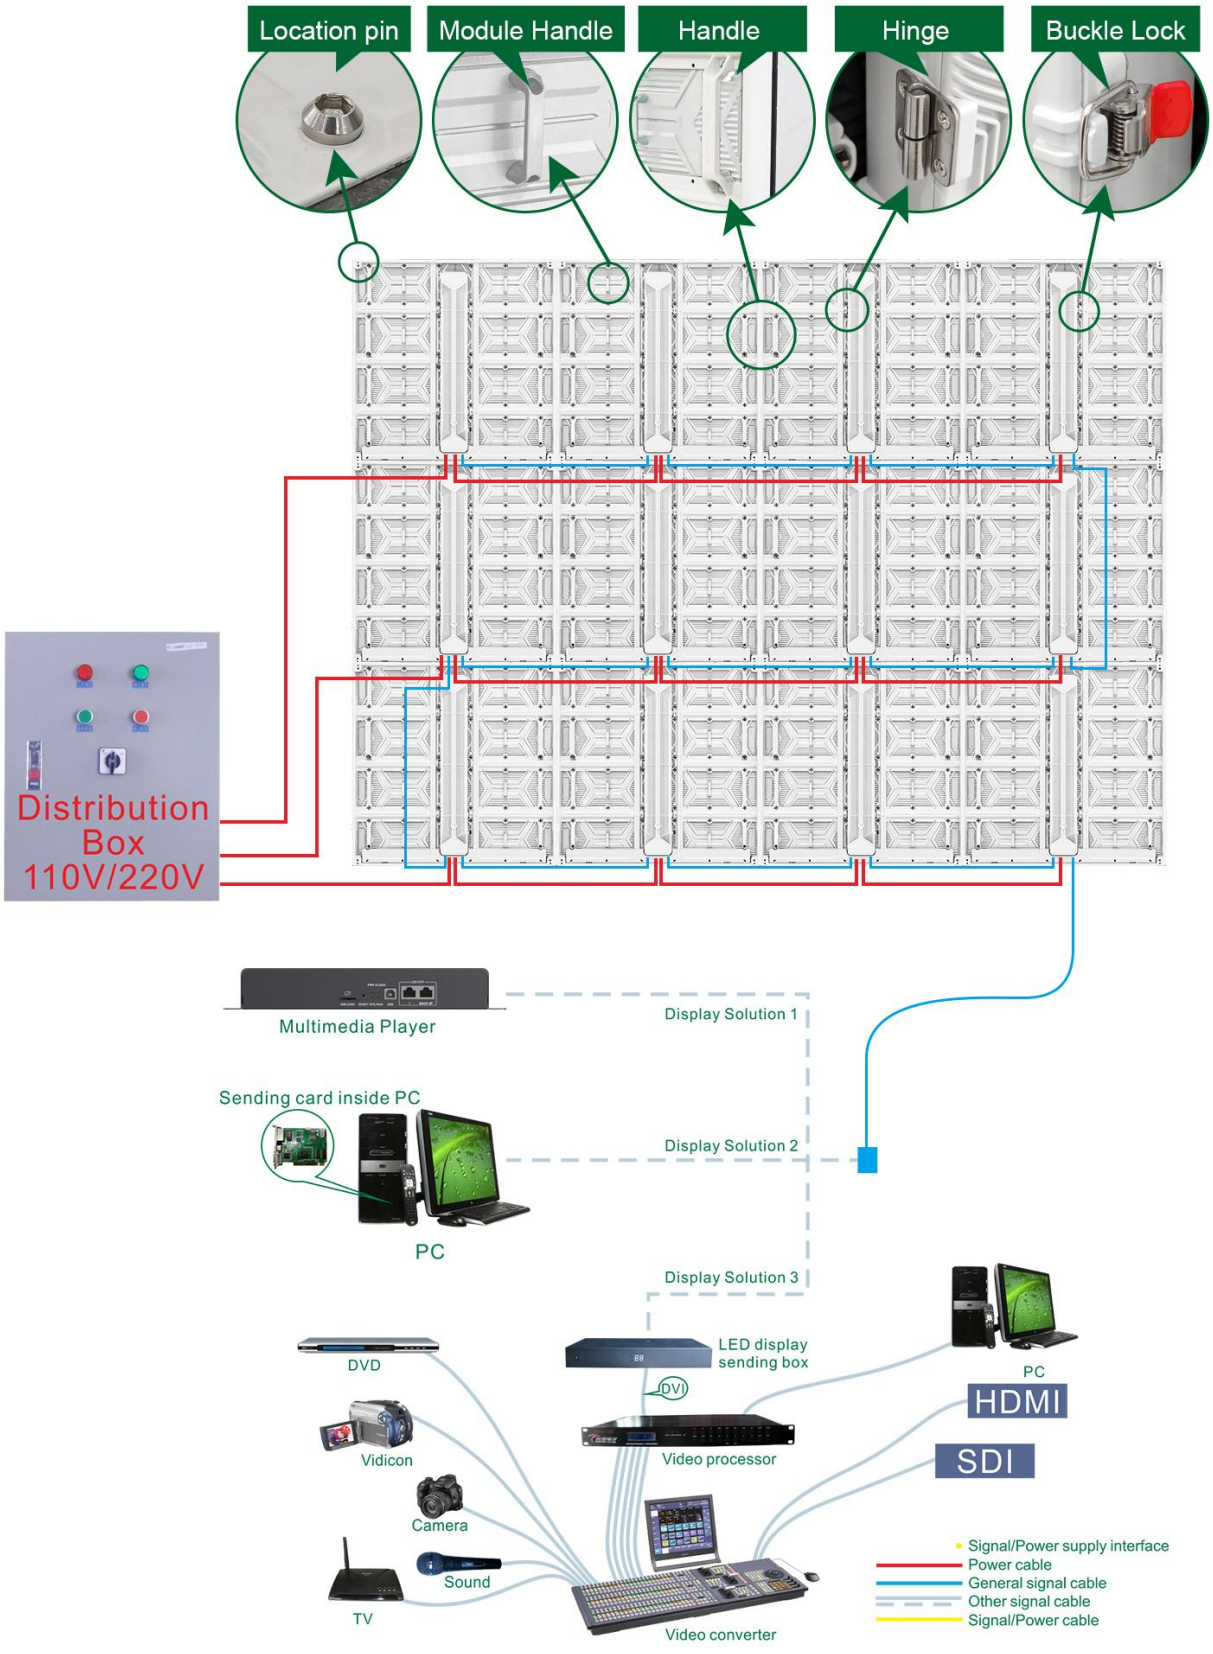

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P10 - 480*640 Magnesium Alloy full color LED display

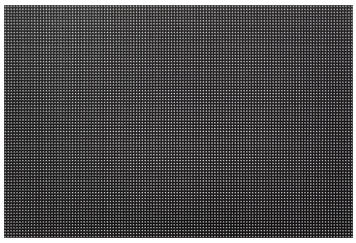

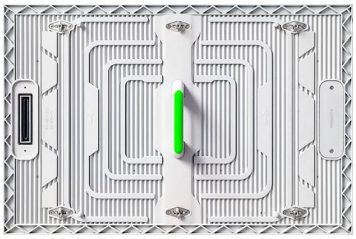

Module

Cabinet





- Front and rear maintenance: accessories can be completely front-maintained, saving space.
- Side waterproofing between module boxes, good waterproof performance
- Magnesium alloy case, ultra-light and ultra-thin with very high strength;
- IP65 protection at the front and rear of the fully enclosed module, normal operation in wind and rain weather
- Quick lock installation, using aviation head quick docking cable for quick installation
- It can be installed on the wall, and the module, power supply, and system front maintenance design can meet various wall-mounted installation conditions
- With the unit size of 480*640mm, users can get more free and flexible assembly methods, and can quickly assemble different sizes of identification signs;
- Application fields: outdoor advertising media, government and enterprise engineering, cultural tourism, sports competitions, image publicity, commercial real estate, etc.;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	10mm、48*32Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC4.6V、≤65W
	Driving IC、Driving way	ICND1069AP、1/2
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium alloy、7.2kg/Cabinet
	Resolution rate、size、Module quantity	48*64Dots、480*640*71.5mm、1*2
	Density	10000 Dots/㎡
	White balance 、Color temperature	5000-5500CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤500W/㎡、≤150W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	- 20~50℃、 Front/Back ： IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	58kg （Estimated data,6pcs /Case）
Outer Package Size	720*630*560㎜ （Estimated data,6pcs /Case）
Packing Material	Flight cases





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

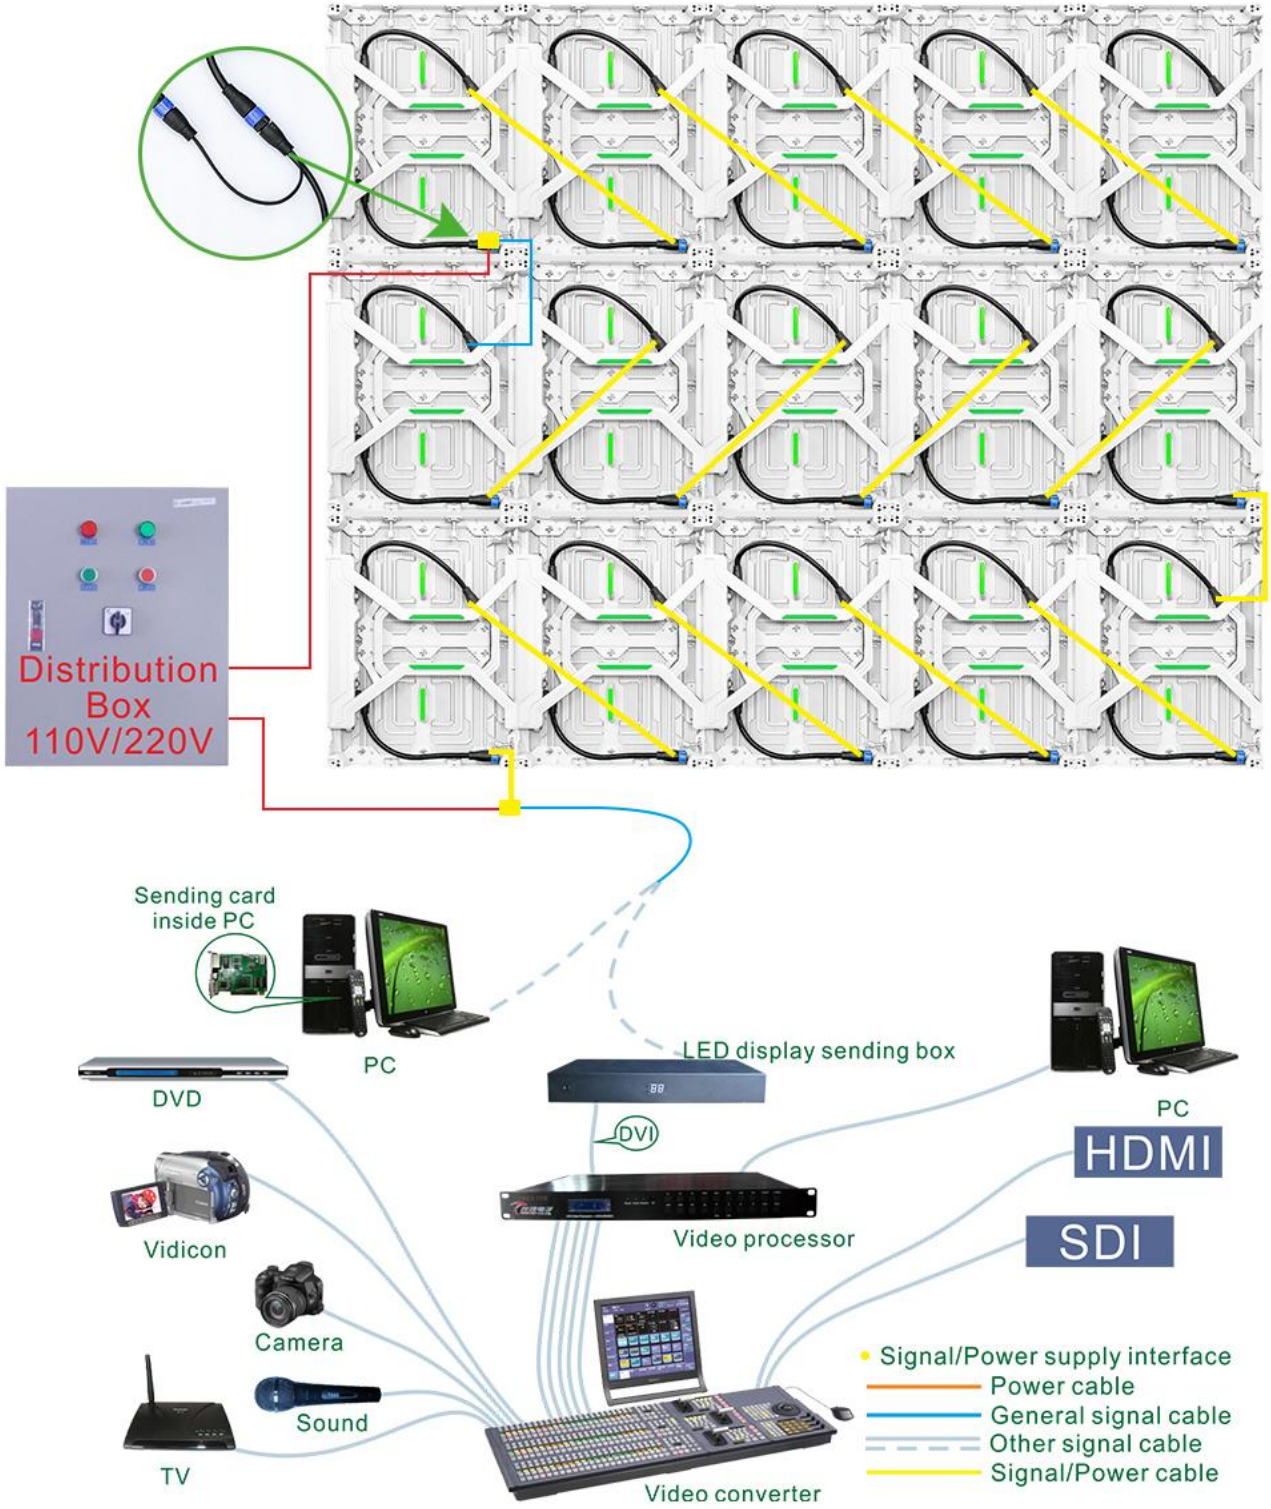

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P10 - 960 * 960 Magnesium Alloy full color LED display

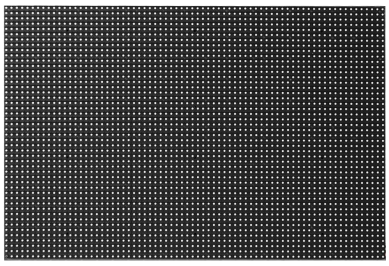


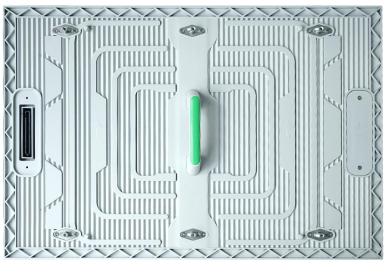

Module

Cabinet



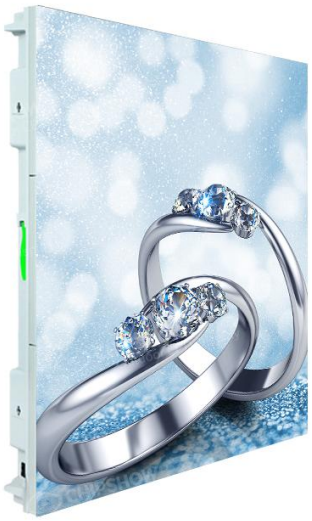

1、The common cathode scheme is adopted,30% energy saving compared with traditional LED display;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、 The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable;

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、 Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	10mm、48*32Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、Module Power	DC3.2，4.2V、≤65W
	Driving IC、Driving way	ICND1069AP、1/2
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、25kg/Cabinet
	Resolution rate、size、Module quantity	96*96Dots、960*960*95mm、2X3
	Density	10000 Dots/㎡
	White balance 、Color temperature	5000-5500CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：120°/120°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤500W/㎡、≤150W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	115kg （Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150㎜ （Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

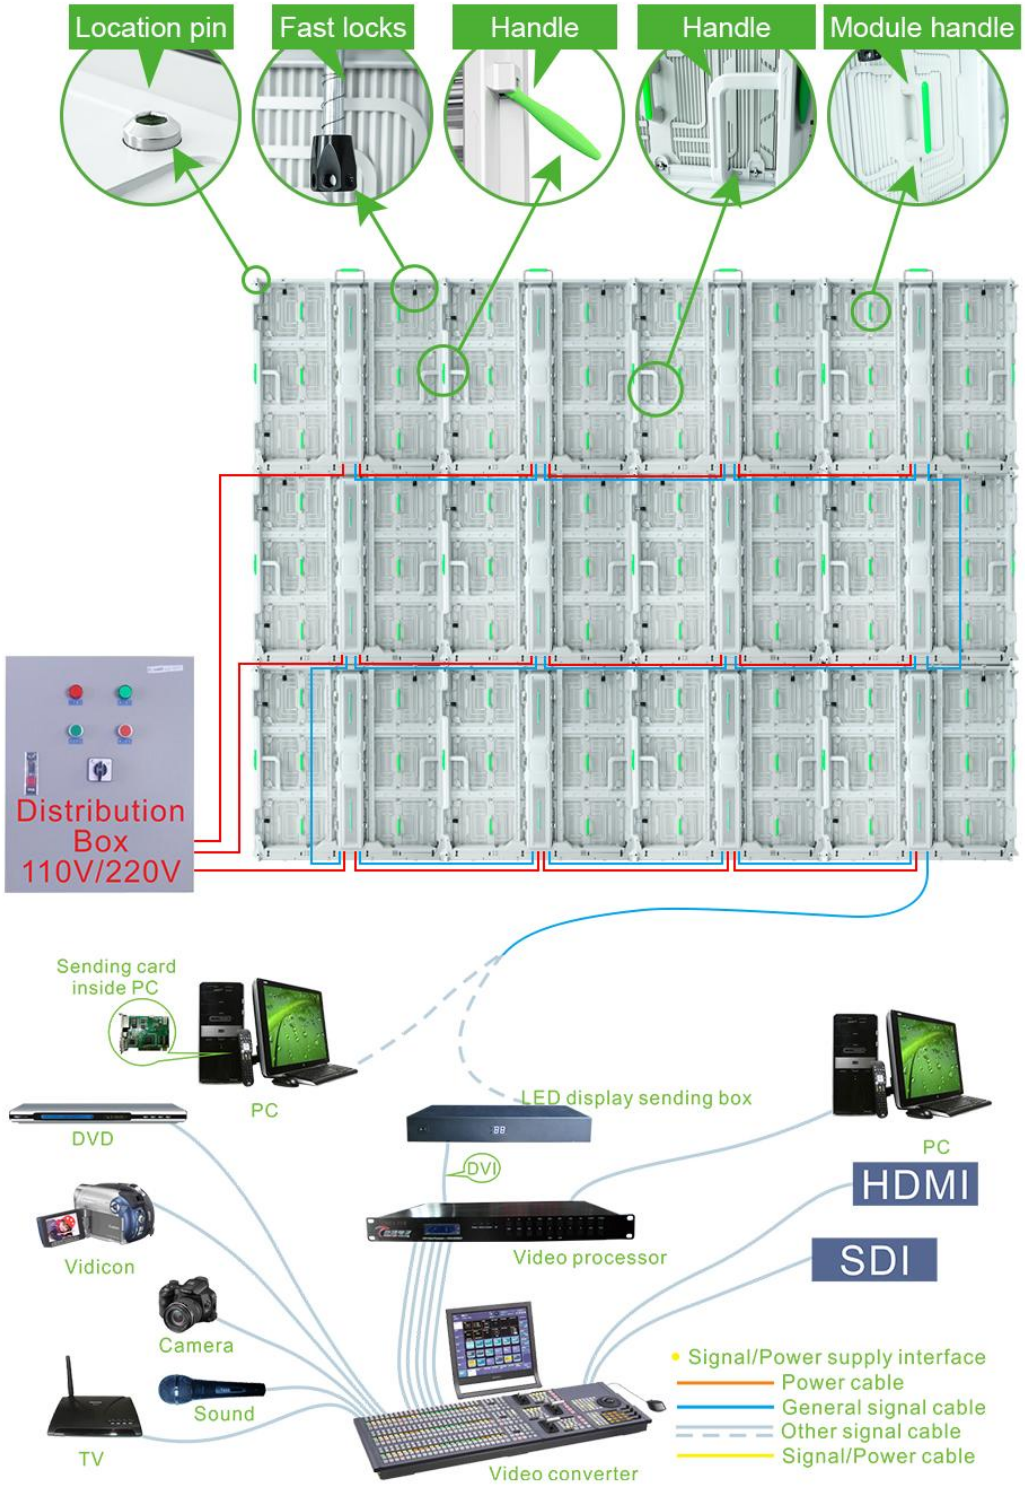

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P10 - 480*640 Magnesium Alloy full color LED display

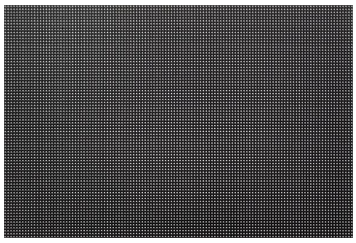

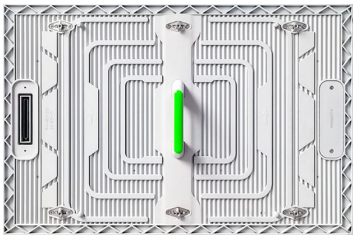

Module

Cabinet





- Front and rear maintenance: accessories can be completely front-maintained, saving space.
- Side waterproofing between module boxes, good waterproof performance
- Magnesium alloy case, ultra-light and ultra-thin with very high strength;
- IP65 protection at the front and rear of the fully enclosed module, normal operation in wind and rain weather
- Quick lock installation, using aviation head quick docking cable for quick installation
- It can be installed on the wall, and the module, power supply, and system front maintenance design can meet various wall-mounted installation conditions
- With the unit size of 480*640mm, users can get more free and flexible assembly methods, and can quickly assemble different sizes of identification signs;
- Application fields: outdoor advertising media, government and enterprise engineering, cultural tourism, sports competitions, image publicity, commercial real estate, etc.;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	10mm、48*32Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 DIP346
	Working voltage、Module Power	DC4.6V、≤45W
	Driving IC、Driving way	MB15124GM-B、1/4
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium alloy、7.2kg/Cabinet
	Resolution rate、size、Module quantity	48*64Dots、480*640*71.5mm、1*2
	Density	10000 Dots/㎡
	White balance 、Color temperature	8500CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：90°/45°、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤350W/㎡、≤115W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	- 20~50℃、 Front/Back ： IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	58kg （Estimated data,6pcs /Case）
Outer Package Size	720*630*560㎜ （Estimated data,6pcs /Case）
Packing Material	Flight cases





Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

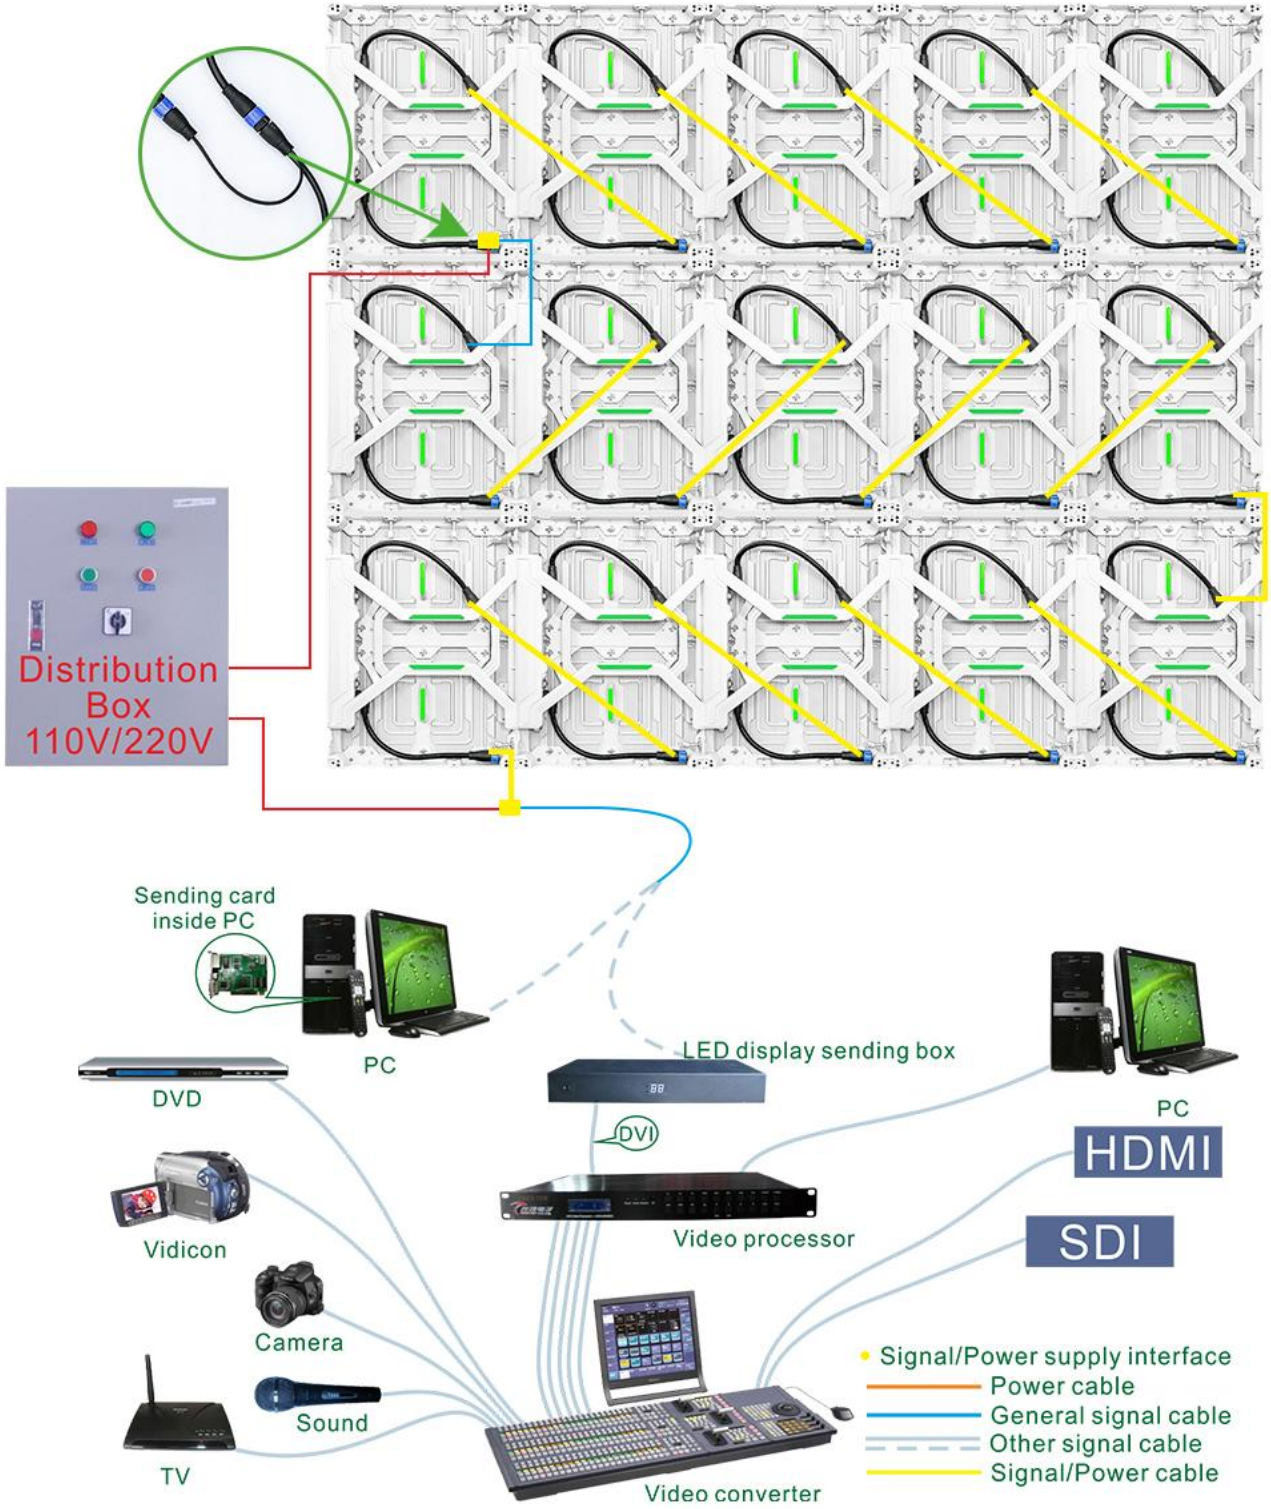

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com

Specifications for outdoor P10 - 960 * 960 Magnesium Alloy full color LED display

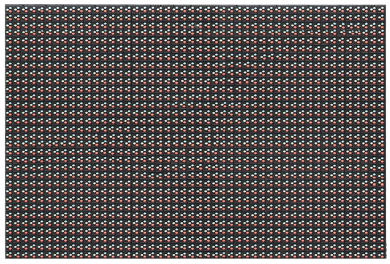


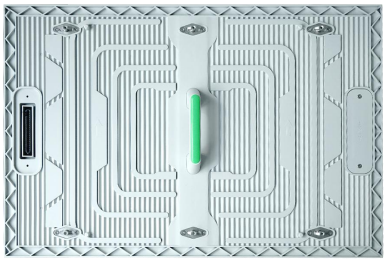

Module

Cabinet



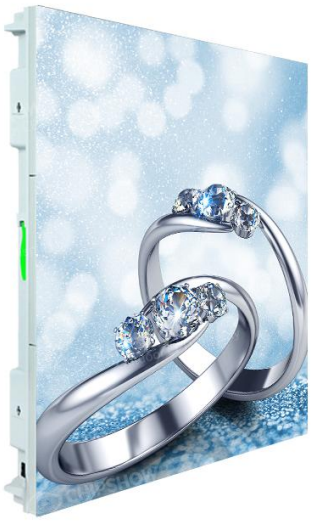

1、DIP high brightness Leds，Stronger and more durable than SMD large screens;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、 The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable；

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、 Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL： 86-755-83419012 FAX： 86-755-82975893
E-mail: manager@chipshow.com
WEB： www.chipshow.com

Technical Parameters：


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	10mm、48*32Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 DIP346
	Working voltage、Module Power	DC4.6V、≤45W
	Driving IC、Driving way	MB15124GM-B、1/4
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、29kg/Cabinet
	Resolution rate、size、Module quantity	96*96Dots、960*960*100mm、2X3
	Density	10000 Dots/㎡
	White balance 、Color temperature	8500CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：90°/45° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤350W/㎡、≤115W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	125kg （Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150mm （Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

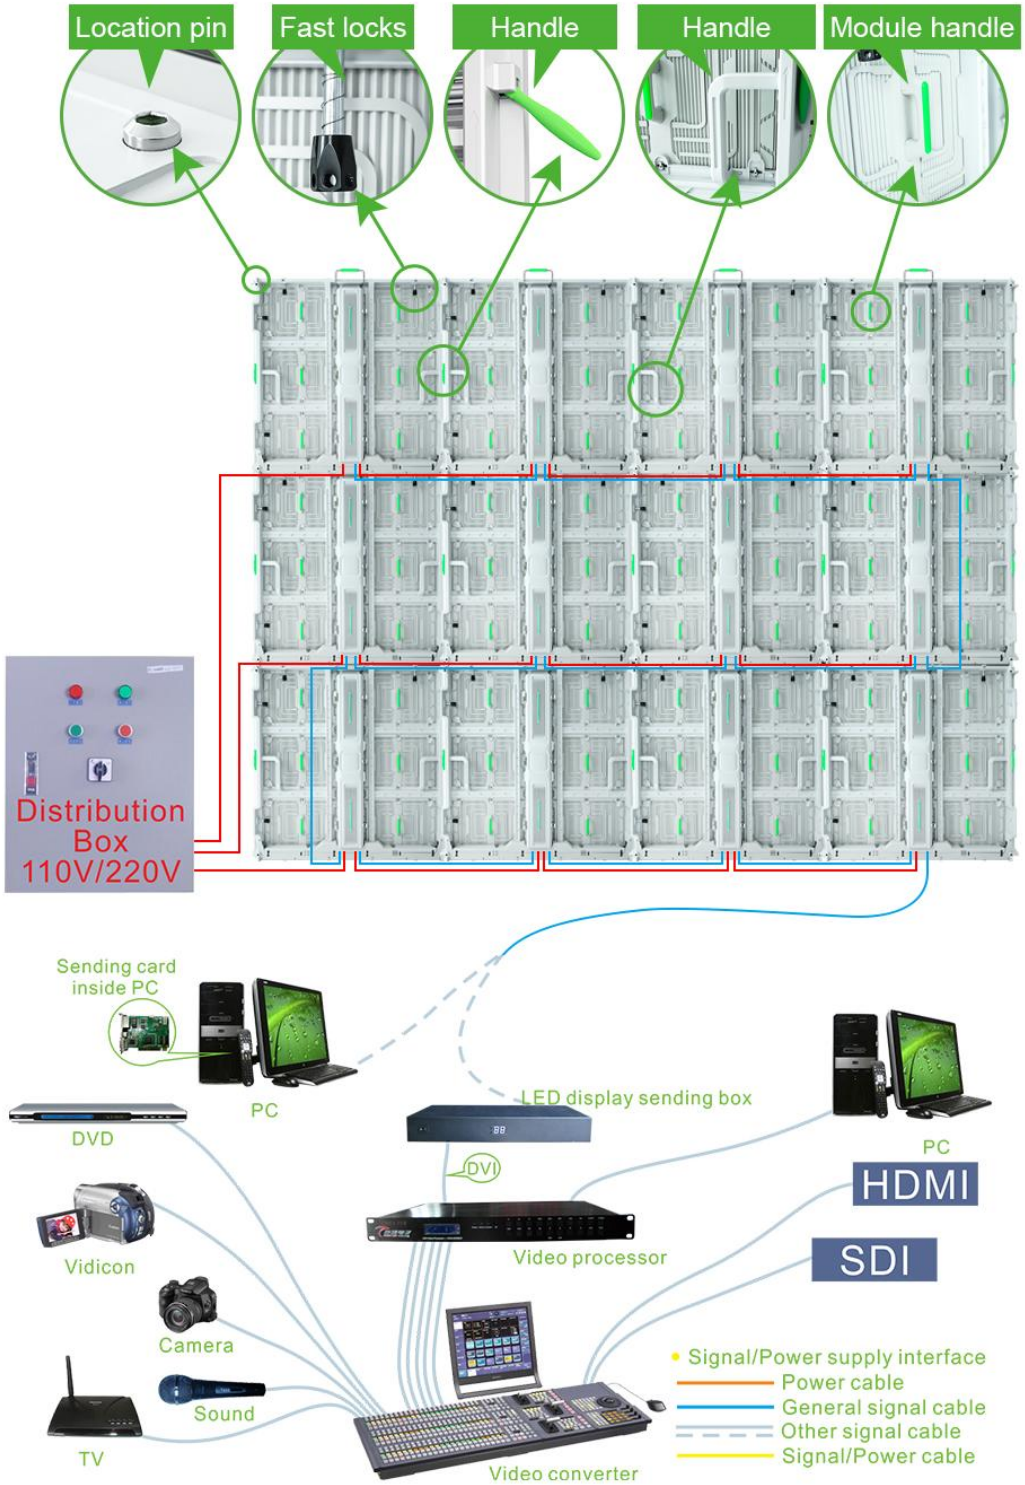

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL: 86-755-83419012 FAX: 86-755-82975893
E-mail: manager@chipshow.com
WEB: www.chipshow.com


Specifications for outdoor P16 - 960 * 960 Magnesium Alloy full color LED display





Module

Cabinet

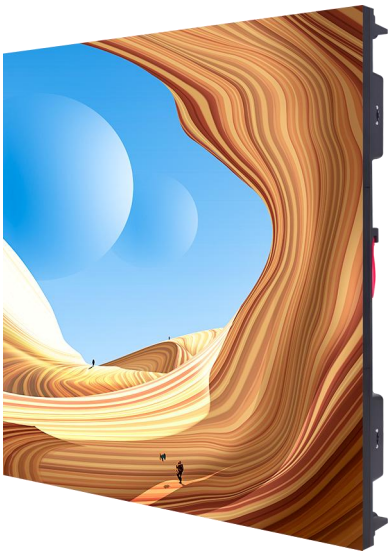



1、DIP high brightness Leds，Stronger and more durable than SMD large screens;

2.、Front and rear maintenance: accessories can be completely front maintenance, saving space;;

3、 The connection between the module and the cabinet is made of side waterproof ring, more reliable for waterproof;

4、 Fully Magnesium Alloy Cabinet, ultra light and ultra-thin, with high strength;

5、High reliability: IP65 protection at the front and rear of the fully enclosed module; hidden wiring, safe and beautiful, stable and reliable；

6、Dual voltage power supply has the function of automatic deployment and dual output to ensure the stability of power supply;

7、 Applications: Outdoor advertising, government enterprise projects, cultural tourism, sports competitions, image publicity, commercial real estate, etc;

5F, Tower C, Baoshi Technological Park,Baoshi Road,
Shiyan Street,Bao'an District,Shenzhen City, China 518108
TEL： 86-755-83419012 FAX： 86-755-82975893
E-mail: manager@chipshow.com
WEB： www.chipshow.com

Technical Parameters：

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	16mm、30*20Dots、480*320
	Pixel color、 Pixel LED	1R1G1B、 DIP346
	Working voltage、Module Power	DC4.2V、≤40W
	Driving IC、Driving way	ICND1069AN、static
	HUB	HUB75
Cabinet Parameter	Material、Cabinet Weight(kg/Cabinet)	Magnesium Alloy、29kg/Cabinet
	Resolution rate、size、Module quantity	60*60Dots、960*960*100mm、2X3
	Density	3906 Dots/㎡
	White balance 、Color temperature	8000CD/㎡、6000-8000K
	view angel、Non-Flatness、Module interval	H/V：100°/45° 、＜0.2mm、＜0.2mm
	Maximal power/㎡、Average power/㎡	≤300W/㎡、≤90W/㎡
	Frame frequency、Refresh frequency、Gray grade	60Hz、3840Hz、13bit
	Control system、System supports	CHIPSHOW，Windows XP，WIN 7
	Working temperature、Protection grade	-20~50℃、 Front/Back ：IP65
	*Reference information, different configurations, different parameters	

Package Parameters：

Gross Weight（kg）	125kg （Estimated data,4pcs /Case）
Outer Package Size	1060*580*1150mm （Estimated data,4pcs /Case）
Packing Material	Wooden pallet+ carton



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

